

Aptean

Administration - System Parameters

Calidus TMS - 12.48

29th April 2014 - 2.0
Reference: ADMINISTRATION

Contents

- 1 System Parameters.....1
 - 1.1 Configuring Parameters.....1
- 2 System Parameters.....3

1 System Parameters

System Parameters are used throughout C-TMS Host to store values that may change over time or vary between Operations.

System Parameters are used to control functionality, by switching functionality on or off, or storing values for functionality to use.


Parameters may be defined as system wide, by cost centre or customer. System wide parameters control functionality across the whole system. Trips and Orders are assigned a cost centre, and this can be used to determine which functionality is applied to an order or trip.

They can be of 2 types:

- those that users are permitted to edit such as MAX_SHIFT_HOURS, SCH_SCHED_START and SLOT_DFLT_TRAILER_TYPE. This is the top table of the screen.
- those parameters that cannot be modified by users such as FORMS_WEB_PATH and MTS_CSV_EXPORT_PATH. This is the bottom table of the screen.

Many of the parameters refer to filenames or directory names that configure the environment, these will vary between environments but it would not be advisable for a user to be able to change them.

System parameters will be added initially by the Development Team and can then be viewed or modified as appropriate using the following form:

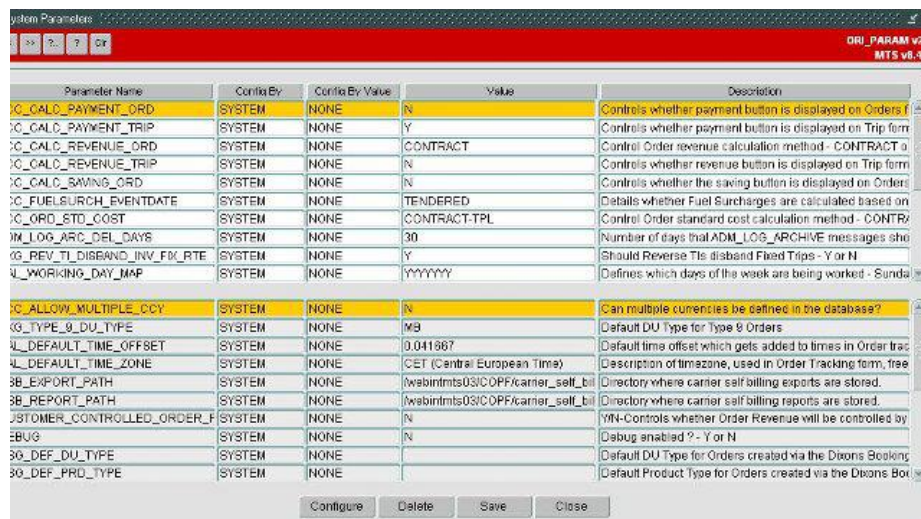

Parameter Name	Config By	Config By Value	Value	Description
IC_CALC_PAYMENT_ORD	SYSTEM	NONE	N	Controls whether payment button is displayed on Orders form
IC_CALC_PAYMENT_TRIP	SYSTEM	NONE	Y	Controls whether payment button is displayed on Trip form
IC_CALC_REVENUE_ORD	SYSTEM	NONE	CONTRACT	Control Order revenue calculation method - CONTRACT or
IC_CALC_REVENUE_TRIP	SYSTEM	NONE	N	Controls whether revenue button is displayed on Trip form
IC_CALC_SAVING_ORD	SYSTEM	NONE	N	Controls whether the saving button is displayed on Orders
IC_FUELSURCH_EVENTDATE	SYSTEM	NONE	TENDERED	Details whether Fuel Surcharges are calculated based on
IC_ORD_STD_COST	SYSTEM	NONE	CONTRACT.TPL	Control Order standard cost calculation method - CONTR
IN_LOG_ARCH_DEL_DAYS	SYSTEM	NONE	30	Number of days that ADM_LOG_ARCHIVE messages sho
IG_REV_TL_DISCARD_INV_FDRTE	SYSTEM	NONE	Y	Should Reverse Tls discard Fixed Trips - Y or N
IL_WORKING_DAY_MAP	SYSTEM	NONE	YYYYYY	Defines which days of the week are being worked - Sunda
IC_ALLOW_MULTIPLE_CCY	SYSTEM	NONE	N	Can multiple currencies be defined in the database?
IG_TYPE_9_DU_TYPE	SYSTEM	NONE	MB	Default DU Type for Type 9 Orders
IL_DEFAULT_TIME_OFFSET	SYSTEM	NONE	0.041887	Default time offset which gets added to times in Order trac
IL_DEFAULT_TIME_ZONE	SYSTEM	NONE	CET (Central European Time)	Description of timezone, used in Order Tracking form, free
3B_EXPORT_PATH	SYSTEM	NONE	/webintmts03/CDPF/carrier_self_bill	Directory where carrier self billing exports are stored.
3B_REPORT_PATH	SYSTEM	NONE	/webintmts03/CDPF/carrier_self_bill	Directory where carrier self billing reports are stored.
CUSTOMER_CONTROLLED_ORDER_F	SYSTEM	NONE	N	Y/N-Controls whether Order Revenue will be controlled by
EBUG	SYSTEM	NONE	N	Debug enabled ? - Y or N
3G_DEF_DU_TYPE	SYSTEM	NONE		Default DU Type for Orders created via the Dioxons Booking
3G_DEF_PROD_TYPE	SYSTEM	NONE		Default Product Type for Orders created via the Dioxons Bo

The screen is split into 2 separate data blocks. The parameters displayed in the top block may be amended manually by a user. The parameters in the bottom block may not be amended by the user.

1.1 Configuring Parameters

To edit a parameter in the top block highlight the parameter and overwrite the information in the Value field.

To configure a non-system configurable parameter:

- Click the parameter.
- Click **Configure**
 - ♦ The system will display a pop-up, showing you the parameter and the description.
- Enter the following details:
 - ♦ Config By - a drop-down list of the configurable levels.
 - ♦ Config By Value - the value relating the the configuration level above. A lookup is provided.
 - ♦ Config Value - the configurable value. Use the description to gather which are appropriate values to each rule.



There are hundreds of system and user configurable parameters, and these are added to all the time. The list of parameters you configure is in the the screen - it is a self-documenting system. For reference, a list exists in [System Parameters List](#).



2 System Parameters

Parameter	Description	
ACC_ACTUAL_DISTANCE	Controls if the distance is rated using actual distance	SYS
ACC_ADD_LINES	Does the user rate by lines and additional tariffs	COS
ACC_ALLOCATE_MANUAL_COST	Allow manual cost payments on orders	SYS
ACC_ALLOW_MULTIPLE_CCY	Can multiple currencies be defined in the database?	SYS
ACC_ALLOW_ZERO_RPE	Allow zero quantity to be returned from get charges (for RPE tier)	SYS
ACC_ALWAYS_APPLY	There are tariffs that should always be applied	SYS
ACC_CALC_SECURITY	Indicates if Security charges are applicable	SYS
ACC_CALC_SERVICES	Service charges applicable	SYS
ACC_CHECK_ORDER	Should order be assessed for rating	SYS
ACC_CONSOL_RADIAL_COSTS	Indicates if radial charges are consolidated at delivery location	SYS
ACC_CONTRACT_OWN	To control if the system looks at the contract or the existing table to identify the charges for own packaging	SYS
ACC_CONTRACT_PICKPACK	To check the relevant contract for a PICKPACK tariff and generate a payment	SYS
ACC_CONTRACT_SERVICES	To control a procedure that will check if there are any service records on the order	SYS
ACC_CUST_FUEL	Apply Customer Fuel Charges	SYS
ACC_Calc_Payment_Ord	Controls whether payment button is displayed on Orders forms - Y or N, Internal Charges are being applied to orders)	SYS
ACC_Calc_Payment_Trip	Controls whether payment button is displayed on Trip forms - Y or N, Trip Cost method is defined against the Carrier Type	SYS
ACC_Calc_Revenue_Ord	Control Order revenue calculation method - CONTRACT or CONTRACT-TPL	SYS
ACC_Calc_Revenue_Trip	Controls whether revenue button is displayed on Trip forms - Y or N, Trip Cost method is defined against the Carrier Type)	SYS
ACC_Calc_Saving_Ord	Controls whether the saving button is displayed on Orders forms - Y or N	SYS
ACC_DEMURRAGE	Number of hours before demurrage charge start	SYS
ACC_EDIT_ORD_CHARGE	Allow users to edit revenue charges	SYS
ACC_FUELSURCH_EVENTDATE	Details whether Fuel Surcharges are calculated based on TENDERED or TRIPSTART date.	SYS
ACC_FUEL_SEC_MODE	Are Fuel and security charges controlled by transport mode	SYS
ACC_INC_ALL_ORDER_COST_PAYMENTS	Include all order cost payments (Y/N)?	COS
ACC_INDEXES	Use Acc indexes	SYS
ACC_INT_CHRG_AT_TRUNK_LEG	Indicates if Internal Charges (trunk and radial) are generated by the trunk leg	SYS
ACC_INVOICE_LOGO	Invoice Logo	COS
ACC_KNOWN_ZONE	Can rating Zone be predicted?	SYS
ACC_LINES_OR_HEADER	Rate orders by line level only (Y), or by header level only or both levels (N)	CUS
ACC_OF_VERSION	Controls format of extract to OF	SYS
ACC_ORD_STD_COST	Control Order standard cost calculation method - CONTRACT or CONTRACT-TPL	COS
ACC_PACKAGES	Are DU type charges separately	SYS
ACC_PLAN_COSTS	Allows user to calc costs from Planned trips	COS
ACC_PROTECT_STATUS	Indicates if Payment status are protected from update to F	SYS



Parameter	Description	
ACC_RATE_BY_PARTY	To control if the rating process will look for a party contract when rating	SYSS
ACC_ROUND_AVG_DU_WEIGHT	Round Avg Du Weight to 3 decimal places for rating	COSS
ACC_SCREENING_CHARGES	Are screening charges applied	SYSS
ACC_SERVICE_METHODS	Controls is services are allocated by methods	COSS
ACC_SHOW_PROFIT	Controls the display of the Profit Field	COSS
ACC_SUPPRESS_RATING	Should rating be prevented when validating orders	CUS
ACC_TRANSPORT_MODE	Is transport mode included in Contract charges	SYSS
ACC_USE_ORD_TRLR_TYPE	Should order revenue be calculated from the order trailer type even when scheduled	COSS
ACC_ZERO_DESPATCHED	Controls if Zero despatched lines are ignored from rating	COSS
ACTIVE_ROLE_DISPLAY	Indicates if the active role is displayed in the tool bar	SYSS
ADDITIONAL_ORDER_VALIDATION	Additional order validation required for product weight	COSS
ADD_CSV_COL_FORMATTING	Add Column Formatting to CSV extracts	SYSS
ADM_EXCLUDE_AUDIT_LOG	Processes that will be excluded from writing audit log records.	SYSS
ADM_EXCLUDE_PACKAGE_MSG	Packages whose adm log messages are not to be written	SYSS
ADM_LOG_ARC_DEL_DAYS	Number of days that ADM_LOG_ARCHIVE messages should be kept for	SYSS
ADM_NO_DISPLAY_MENU	Enable the user to access the menu item	SYSS
ADM_UNKOWN_ORDERS	Identify amended/duplicate orders	SYSS
ADM_UPSHIFT_DU_TYPE	Upshifts the despatch unit type when Y.	SYSS
ADM_UPSHIFT_PRODUCT_TYPE	Upshifts the product type when Y	SYSS
ADM_WRITE_ERRORS	Store fatal form errors in FORM_ERROR_LOG	SYSS
ADR_REGS	Are ADR regulations displayed for trips	COSS
ALLOC_RESOURCE	Are drivers and tractors allocated to own fleet carriers?	SYSS
ALLOC_TRIP_PMNTS	Allocate the trip payments as order costs	SYSS
ALLOW_DIRECT_BAY_MOVES	Should orders be moved directly from the receipt bay or to the despatch bay from the grid?	SYSS
ALLOW_DUPLICATE_CUST_REF	Allow orders with duplicate cust refs but different to locations.	SYSS
ALLOW_ETA_UPDATES	Determines whether the user can update ETA values	COSS
ALLOW_HOLD_ORDERS	allow orders to be place don hold	SYSS
ALLOW_MANUAL_RPE	Allow RPE to be entered (via the inbound EDI) and do not overwrite.	SYSS
ALLOW_MISSING_DEL	Is unit weight sent in the items	SYSS
ALLOW_MULTIPLE_ADD_REFS	Allow multiple additional references for an order values will be (Y/N)	COSS
ALLOW_POC_EDIT	Allow users to edit the POC Flag in Debrief	SYSS
ALLOW_TENDERED_PARAGON_TRIPS	Allow Tendered Trips in Paragon	COSS
ALLOW_TENDERED_PARAGON_TRIPS	Allow Tendered Trips in Paragon	COSS
ALLOW_TRP_DEL_TYPE_UPDATE	Allow Delivery type updates in the planning screen	CAR
ALLOW_UNLOAD_ASSET	Controls if asset records are created as part of unload	SYSS
ALLOW_UNCHEDULE_SCHED_COLL	Controls if menu item Unschedule sched coll is displayed	SYSS
ALTERNATE_DB_NAME	Alternate DB Name	SYSS
ALTERNATE_ORDER_ENTRY	Validate item identifier field	COSS
AMAZON_OWNER_CODE	Asset owner code to pass to Amazon	SYSS
API_CARRIER	Carrier ID for API	SYSS
API_EVENTS	Are events sent out via API	SYSS
API_TEXT_AUTHORISATION	authorisation code for API text	SYSS
API_TEXT_END	Time of day the system stops sending texts	SYSS



Parameter	Description	
API_TEXT_ENDPOINT_URL	URL endpoint for API text	SYS
API_TEXT_START	Time of day the system can start sending texts	SYS
API_WS_ADDRESS	WebService endpoint for API events	SYS
API_WS_ELUCID_ADDRESS	WebService endpoint for API events for Elucid	SYS
API_WS_ELUCID_PASSWD	WebService password for API events for Elucid	SYS
API_WS_ELUCID_USER	WebService username for API events for Elucid	SYS
APPLY_ADDITIONAL_LOC_CHECKS	To enable additional validation checks for location entry.	SYS
ARDO_INBOUND_ARCH	Path for processed XML files that have successfully completed processing, see: int_po_inbound_header (Unilever)	SYS
ARDO_INBOUND_FAIL	Path for processed XML files that have failed processing for reasons described against int_po_inbound_header (Unilever)	SYS
ARDO_INBOUND_PATH	Path for yet to be processed XML files (Ardo)	SYS
ASSEMBLY_DU_TYPE	Assembly DU Type	CO
ASSET_AT_FIXED_ORIGIN	Asset At Fixed Origin	CO
ASSET_DEBRIEF	Indicates if assets debriefed with Items	CO
ASSET_FORMAT	Indicates which order item field will identify an asset	CO
AUTO_COMMIT_EMPTY_STOPS	Commit After Deletion of Empty Stops	CO
AUTO_PLAN_ORDERS	Auto Plan orders onto an existing trip	CO
AUTO_ROUTE_NEW_ORDERS	Automatically plan orders loaded	SYS
AUTO_SCHEDULING	Auto Scheduling of orders	CO
AUTO_SCHED_INACTIVE_DEPOTS	List the inactive depots to exclude from the fixed drop scheduling engine.	SYS
AUTO_SET_DELIVERY_TYPES	Automatically set delivery type rules	CO
BEIG2_FTP_DESTINATION_DIRECTORY	Directory for FTP of BirdsEye Files	SYS
BEIG2_FTP_DESTINATION_IP_ADDRESS	IP for FTP of BirdsEye Files	SYS
BEIG2_FTP_DESTINATION_PASSWORD	Password for FTP of BirdsEye Files	SYS
BEIG2_FTP_DESTINATION_PORT	Port for FTP of BirdsEye Files	SYS
BEIG2_FTP_DESTINATION_USERNAME	Username for FTP of BirdsEye Files	SYS
BEIG2_INBOUND_ARCH	Path for processed XML files that have successfully completed processing, see: int_po_inbound_header	SYS
BEIG2_INBOUND_FAIL	Path for processed XML files that have failed processing for reasons described against int_po_inbound_header	SYS
BEIG2_INBOUND_PATH	Path for yet to be processed XML files	SYS
BEIG2_OUTBOUND_ARCH	Path for processed XML files that have successfully completed processing, see: int_po_inbound_header	SYS
BEIG2_OUTBOUND_FAIL	Path for processed XML files that have failed processing for reasons described against int_po_inbound_header	SYS
BEIG2_OUTBOUND_PATH	Path for yet to be processed XML files	SYS
BEIG_ENABLED	To enable the inbound and outbound file processing on this DB	SYS
BEIG_FTP_DESTINATION_DIRECTORY	Directory for FTP of BirdsEye Files	SYS
BEIG_FTP_DESTINATION_IP_ADDRESS	IP for FTP of BirdsEye Files	SYS
BEIG_FTP_DESTINATION_PASSWORD	Password for FTP of BirdsEye Files	SYS
BEIG_FTP_DESTINATION_PORT	Port for FTP of BirdsEye Files	SYS
BEIG_FTP_DESTINATION_USERNAME	Username for FTP of BirdsEye Files	SYS
BEIG_INBOUND_ARCH	Path for processed XML files that have successfully completed processing, see: int_po_inbound_header	SYS
BEIG_INBOUND_FAIL	Path for processed XML files that have failed processing for reasons described against int_po_inbound_header	SYS
BEIG_INBOUND_PATH	Path for yet to be processed XML files	SYS



Parameter	Description	
BEIG_OUTBOUND_ARCH	Path for processed XML files that have successfully completed processing, see: int_po_inbound_header	SYS
BEIG_OUTBOUND_FAIL	Path for processed XML files that have failed processing for reasons described against int_po_inbound_header	SYS
BEIG_OUTBOUND_PATH	Path for yet to be processed XML files	SYS
BGW_AUTO_REBOOK	Indicates if auto rebook is switched on when non conformance is added	CO
BGW_DUMMY_WASTE	Defines Dummy waste location for BGW.	CO
BGW_TRAILER_SET	Defines which Trailer Types are allowed.	CO
BKG_APPEND_TO_ORDERS	Controls whether Bookings can append to an existing Order if the Slot is already used.	SYS
BKG_AUTO_CREATE_SLOT	Creates slots if no slot exists	SYS
BKG_DEF_COST	Default Cost Centre for Bookings	SYS
BKG_DEF_CUST	Default Customer for Bookings	SYS
BKG_DEF_DELIVERY_DEL_TYPE	Any order that are created via the interface, that are delivering to their final loc	SYS
BKG_DEF_POPULATE_DEL	Any order that are created via bookings will have Del Type populated by system, specific to DSG	SYS
BKG_DEF_TRUNK_DEL_TYPE	Defines the default booking trunk delivery type for any orders being delivered into a x-dock location, default to null	SYS
BKG_GEN_TI_METHOD	Defines whether Gen TI does standard, xdock of both processes, STANDARD, BOTH or XDCK.	SYS
BKG_INCREMENT	Increment exiting Bookings on import rather than overwriting	SYS
BKG_REV_TI_DISBAND_INV_FIX RTE	Should Reverse TIs disband Fixed Trips - Y or N	SYS
BKG_SLOT_INACTIVATE	Controls whether existing Slots are updated to INACTIVE during a Slot Import.	SYS
BKG_TYPE_9_DU_TYPE	Default DU Type for Type 9 Orders	SYS
BKG_USE_BOOKING_STATUS	Defines whether booking status is being used, N, PROVISIONAL, PLANNED or CONFIRMED.	SYS
BMW_DOT_CODE	Tyre Age for BMW	SYS
BUF_OLD_ORD_CLEAR_DAYS	Number of days in the past to be checked by the Buffalo order clear down	SYS
BWSC_GEO_ADD_NETWORK_LOV_LIMIT	When set to Y the LOV for adding network locations will only show SSS, BRANCH and PLANT locations	SYS
CALCULATE_CONTRACTUAL_WEIGHT_TRG	Allow contractual weights to be re-calculated via database trigger (set to N for LFS testing)	SYS
CALC_DIMEN	Calculate volume from dimensions	CO
CALIDUS_ASSIST_BASE_URL	URL for Calidus Assist Install	SYS
CALIDUS_ASSIST_RELEASE_DB	The final part of the URL used to view the release notes, for this database, on Calidus assist.	SYS
CALL_LOGGING_DATE_RANGE	Call Logging Date Range Days	SYS
CAL_DEFAULT_TIME_OFFSET	Default time offset which gets added to times in Order tracking, for users viewing data in different timezone	SYS
CAL_DEFAULT_TIME_ZONE	Description of timezone, used in Order Tracking form, freetext	SYS
CAL_WORKING_DAY_MAP	Defines which days of the week are being worked - Sunday to Saturday, Y or N.	CO
CANCEL_STATUS_CHK	Only orders on Planned trips can be cancelled	SYS
CARGOWISE_BILLING_BRANCH_CODE	Billing Branch Code for Cargowise	CO
CARGOWISE_BRANCH	Branch for Cargowise	CO
CARGOWISE_CONSIGNEE	Consignee name for Cargowise	CO
CARGOWISE_DATABASE	Controls which cargowise database invoices are exported to	CO
CARGOWISE_DEPARTMENT	Department code	CO



Parameter	Description	
CARGOWISE_DESTINATION_PORT	Destination Port	COS
CARGOWISE_EXPORT	Payments are exported to Cargowise	COS
CARGOWISE_ORIGIN_PORT	Origin Port for Cargowise	COS
CARRIER_API_CLIENT_CODE	Value sent across to LFE in API	SYS
CARRIER_API_MANIFEST_READY_TIME	The cut-off time for the ready time for the carrier manifest (HH24:MI).	SYS
CARRIER_API_WS	Endpoint for LFE API	SYS
CARRIER_API_WS_AMEND	Endpoint for Carrier API updates	SYS
CARRIER_API_WS_CANCEL	Endpoint for Carrier API cancellations	SYS
CARRIER_INVOICE_TYPE	Carrier Invoice type	SYS
CARRIER_RULES_ALL	Controls if all du types and products are checked	SYS
CARRIER_WORK_REP_FOOTER_1	The footing printed at the bottom of the CARRIER_WORK_CONF report (first part).	SYS
CARRIER_WORK_REP_FOOTER_2	The footing printed at the bottom of the CARRIER_WORK_CONF report (second part).	SYS
CARR_GAZ_POSTCODE_FORMAT	For which carrier gazetteer formats will the postcode in the file exclude spaces. (List delimited with semi-colons)	SYS
CARR_SRVCE_LEVEL_OFFSET_DAYS	The default minimum number of offset days to calculate the collection job date for UKMail.	COS
CC_FORMAT_PATTERN	Click and Collect Ext Ref format	SYS
CD_DIR	Directory used for copying zipped files	SYS
CFX_CARRIER	Stores the name of CFX Carrier	CAR
CFX_CONTROL	Is there control over which trips go to CFX	SYS
CFX_CONTROL_CUSTOMER	Controls which customers are configured for CFX	CUS
CFX_EXT_LOCATION_NAME	Include the extra location name in the CFX messages (Y/N)	SYS
CFX_LINES_AND_ITEMS	Are items and lines included in CFX file, S,D,B,N	SYS
CFX_NEW_ORDERS	Does adding orders to a trip re-trigger the CFX file?	SYS
CFX_ORDER_ADDRESSES	Are order addresses include in the CFX file	SYS
CFX_ORDER_HEADER	Are orders included in CFX file	SYS
CFX_ORDER_HEADER_TMS	Is the order header TMS section included in CFX file	SYS
CFX_OWNING_DEPOT	Is the owning depot included in the filename?	SYS
CFX_SEND	Are trips sent to CFX	SYS
CFX_STATUS_CHECK	Are carriers checked at status change for CFX?	SYS
CHANGE_DEBRIEF_LABELS	Controls the labels for certain items in the debrief and orders screen	SYS
CHANGE_PRINTER	Is change printer displayed	COS
CHECK_ELUCID_IMBALANCE	Check for stock imbalance at Elucid	COS
CHECK_RESOURCES	Check Resource on existing trips before allocation	SYS
CHG_SCHED_DATE_TRIP	A comma-separated list of trip status for which the schedule may be changed	SYS
CIM_CONF_INBOUND_IDENTIFIER	Pattern for MIC Order Inbound XML	SYS
CIM_CONF_INBOUND_LISTING_NAME	Filename for list of files in directory for MIC XML Order Inbound	SYS
CIM_CONF_LISTING_SCRIPT_NAME	Script name for MIC XML Order Inbound	SYS
CIM_ENABLED	XML Isotrak enabled for this database	SYS
CIM_INBOUND_ARCH	Path for CIM XML archiving	SYS
CIM_INBOUND_FAIL	Path for CIM XML failures	SYS
CIM_INBOUND_IDENTIFIER	Pattern for MIC Order Inbound XML	SYS
CIM_INBOUND_LISTING_NAME	Filename for list of files in directory for MIC XML Order Inbound	SYS
CIM_INBOUND_MAR_IDENTIFIER	Pattern for CIM Order update XML	SYS
CIM_INBOUND_PATH	Path for yet to be processed XML files from CIM	SYS
CIM_LISTING_SCRIPT_NAME	Script name for MIC XML Order Inbound	SYS



Parameter	Description	
CIM_OUTBOUND_ARCH	Path for archiving outbound CIM XML interfaces	SYS
CIM_OUTBOUND_FAIL	Path for failing outbound CIM XML interfaces	SYS
CIM_OUTBOUND_PATH	Path for outbound CIM XML interfaces	SYS
CLICK_CUST	Click and Collect Customer	SYS
CLIENT_CODE_CHECK	Client code assessment for Location import	SYS
CMD_MERGE_DOCUMENTS	The command to merge documents can be stored with any paths that need to be unset to allow the process to be performed.	SYS
CMR_NOTE	Name of the CMR note report	CO
CMR_NOTE1	Name of the CMR note report	CO
CNT_SERVICE_LEVEL_OFFSETS	Enable collection and delivery offsets for service levels (Y/N)	SYS
CNT_SUMMER	Date Summer starts this current year	SYS
CNT_WINTER	Date WINTER starts this current year	SYS
CO2_EMISSIONS_LTR	Defines Amount of CO2 emissions per litre of fuel.	CO
COMBINED_DOCUMENTS_REPORT	Name of the Combined Documents report.	CO
CONSOLIDATE_TRIPS	Remove Duplicate lines when trip is ACCEPTED	SYS
CONSOL_BY_SHIPMENT	Consolidation at Shipment level	CO
CONSOL_RUNNING	Indicates whether the order consolidation process is currently running.	SYS
CONTINGENCY_IMPORT	Contingency Import setting	CO
CON_MAX_RPE	Max RPE per shipment	CO
COST_CENTRE_LOGO	Customer logo filename	CO
COST_CENTRE_POST_MATRIX	Does this cost centre use Post Matrix type charging?	CO
COST_CENTRE_SEGREGATION	Segregate data by cost centre	SYS
CREATE_ORD_MANF	Controls if an order manifest record is created	CO
CSB_EXPORT_PATH	Directory where carrier self billing exports are stored.	SYS
CSB_REPORT_PATH	Directory where carrier self billing reports are stored.	SYS
CS_CLOSE_BY	Display trips in cust serv that are within x miles of order	SYS
CS_DEFAULT_BOOKING_STATUS_OLD	Customer Services Default Booking Status	SYS
CS_DEFAULT_ORDER_STATUS_OLD	Customer Services Default Order Status	SYS
CTMS_CITD_FTP_DESTINATION_DIRECTORY	CITD Destination Directory	SYS
CTMS_CITD_FTP_DESTINATION_IP_ADDRESS	CITD Destination IP Address	SYS
CTMS_CITD_FTP_DESTINATION_PASSWORD	CITD Destination Directory Password	SYS
CTMS_CITD_FTP_DESTINATION_PORT	CITD Destination Directory Port	SYS
CTMS_CITD_FTP_DESTINATION_USERNAME	CITD Destination Directory username	SYS
CTMS_ESI_FTP_DESTINATION_DIRECTORY	Directory for FTP of Outbound Trips Files.	SYS
CTMS_ESI_FTP_DESTINATION_IP_ADDRESS	IP Address for FTP of Outbound Trips Files.	SYS
CTMS_ESI_FTP_DESTINATION_PASSWORD	Password for FTP of Outbound Trips Files.	SYS
CTMS_ESI_FTP_DESTINATION_PORT	Port for FTP of Outbound Trips Files.	SYS
CTMS_ESI_FTP_DESTINATION_USERNAME	Username for FTP of Outbound Trips Files.	SYS
CTMS_MANF_FTP_DESTINATION_DIRECTORY	Manifest Destination Directory	SYS
CTMS_MANF_FTP_DESTINATION_IP_ADDRESS	Manifest Destination IP Address	SYS
CTMS_MANF_FTP_DESTINATION_PASSWORD	Manifest Destination Directory Password	SYS
CTMS_MANF_FTP_DESTINATION_PORT	Manifest Destination Directory Port	SYS
CTMS_MANF_FTP_DESTINATION_USERNAME	Manifest Destination Directory username	SYS
CTMS_OUTBOUND_TRIP_ARCH	File path for Outbound Trips.	SYS
CTMS_OUTBOUND_TRIP_ARCH_TEST	File path for Outbound Trips archive.	SYS
CTMS_OUTBOUND_TRIP_FILENAME	Filename for Outbound Trips.	SYS
CTMS_OUTBOUND_TRIP_FLAG	Flag to permit the creation of Outbound Trips (Y/N).	SYS
CTMS_OUTBOUND_TRIP_MSG_TYPE	The Message Type of the Outbound Trips (Y/N).	SYS
CTMS_OUTBOUND_TRIP_OWNING_DEPOT	The owning depot of the Outbound Trips (Y/N).	SYS
CTMS_OUTBOUND_TRIP_PATH	File path for Outbound Trips.	SYS



Parameter	Description	
CTM_ACCEPT_TRIP_UPDATE_DATA	Should Trip data be entered when user Accepts a trip - Y or N	CAR
CTM_ACCEPT_TRIP_UPDATE_DATA	Should Trip data be entered when user Accepts a trip - Y or N	CAR
CTM_DISP_SCHEDTRIP_OR_BOL	Display Sched/Trip or BOL in Carrier Trip Management - SCHEDTRIP or BOL	CAR
CTM_MSG_CHASE_AFTER	Time(mins) after which a message should be sent to a carrier after failure to respond	CAR
CTM_MSG_CHASE_AFTER	Time(mins) after which a message should be sent to a carrier after failure to respond	CAR
CTM_REFRESH_TIMER_INTERVAL	Automatic Timer Refresh Interval for Carrier Trip Management - Enter value in mins	CAR
CTM_SHOW_TRIP_TIMES	Show trip times in Carrier Trip Management form - Value is Y or N	CAR
CUSTOMER_CONTROLLED_ORDER_REVENUE_ACTUALS	Y/N- greater of planned and actual quantity	SYS
CUSTOMER_LOGO	Customer logo filename	CUS
CUSTOMER_SERVICE_LEVEL	Enable Customer Specific Service Levels	SYS
CUST_DU_CONS_SCHED	Consolidate DU By Schedule	CUS
CUST_UPDATE_ORDER_LINES	Update Orders	CUS
DEBRIEF_DRIVERS_HOURS	Enter Drivers hours worked at debrief	CO
DEBUG	Debug enabled ? - Y or N	SYS
DEFAULT_DEL_TYPE	Default Delivery Type	CO
DEFAULT_DU_TYPE	Default Du Type for NHS	SYS
DEFAULT_ORACLE_DIRECTORY	Stores System directory for TMP_DIR in EXPORT production	SYS
DEFAULT_PART_NO	Default part Number	CUS
DEFAULT_PAR_DEL_TYPE	Default Del type for paragon	CO
DEFAULT_PROD_TYPE	Default Product Type	CO
DEFAULT_REBOOK_DEL_TYPE	Default Del type for Rebook	CO
DEFAULT_SLOT_DELETION_DAYS	Number of days after which an inactive slot is deleted	SYS
DEFAULT_TRAILER_TYPE	Default Trailer Type	CO
DEFAULT_UNSCHEDULED_CARRIER	Indicates a default carrier may be used to print labels for unscheduled orders during packing.	SYS
DEF_AQ_SCHEMA	Schema for use when starting advanced queues	SYS
DEF_CALLOUT_DEL_TYPE	Default Callout Delivery Type	SYS
DEF_COST	Default Cost Centre for NHSBT	SYS
DEF_INSPECT_DEL_TYPE	Default Inspection Delivery Type	SYS
DEF_INSPECT_SERVICE	Default Inspection Service Level	SYS
DEF_SERVICE_LEVEL	Default service level for orders when null	CO
DELCONF_FTP_DESTINATION_DIRECTORY	Directory for FTP of Microlise Files	SYS
DELCONF_FTP_DESTINATION_IP_ADDRESS	IP for FTP of Microlise Files	SYS
DELCONF_FTP_DESTINATION_PASSWORD	Password for FTP of Microlise Files	SYS
DELCONF_FTP_DESTINATION_PORT	Port for FTP of Microlise Files	SYS
DELCONF_FTP_DESTINATION_USERNAME	Username for FTP of Microlise Files	SYS
DELETE_ALL_PMTS_AT_PLANNED	Delete All payments for a trip at Planned Status	CO
DELIVERY_CUTOFF	Cost Centre Delivery Cut Off	CO
DELIVERY_NOTE	Name of the delivery note report	CO
DEL_LEVEL_PARAM	Level of data reported in the Delivery docs	CO
DEL_TIME_OFFSET	The earliest delivery time ahead of the requested delivery date and time sent from PULSE	CO
DESPATCH_EMAIL	Create Despatch email control record	SYS
DESPATCH_REPORT	Name of the despatch note report printed from the trip tree	CO
DHL_INV_EMAIL	List of emails (sep with ;) for monthly DHL Invoicing data	SYS



Parameter	Description	
DIM_CHARGE_WEIGHT	Kg Value for dimensional weight calculation	CUS
DIRECT_CARRIER	Stores the carrier ID that will go direct and not via a location - the via routing code will not be displayed.	SYS
DISABLE_ITEM_ID	Disable the item identifier in order entry	CO
DISPLAY_DESPATCHED_RPE	Display the Actual Despatched RPE Quantity in the Order Detail and Trip Debrief screens?	CO
DISPLAY_PARAGON_LOC_ID	Display Paragon ID and EXT Ref in Locations Screen	SYS
DISPLAY_PO_REF_REPORT	PO Ref to be displayed in delivery note	CUS
DISPLAY_WIC_CODE	Determines if the delivery type of the order for the customer contains a WIC Code and whether the title will be displayed in the Order Details screen	CUS
DISTRIBUTION_OFF	Is revenue distributed as part of trip charges?	SYS
DOM_DIMS	Domestic version of dimensions functionality	CO
DONT_SEND_PLANNED_TO_WEBFLEET	When the parameter is set control record is not sent for PLANNED status	CO
DSG_ALLOW_BKG_IN_PAST	Allow Bookings in the past from the Dixons Bookings interface - Y or N.	SYS
DSG_DEF_DU_TYPE	Default DU Type for Orders created via the Dixons Bookings interface.	SYS
DSG_DEF_PRD_TYPE	Default Product Type for Orders created via the Dixons Bookings interface.	SYS
DSG_TRIP_DTL_PATH	File path for DSG Trip detail messages.	SYS
DU_PARAMS	DUs may be used as charge parameters	SYS
EARLY_ARR_REASON_CODE	Early reason code for trip deliveries	SYS
EDI1214_DELIMITER	File delimiter in EDI1214 file	SYS
EDI1214_ENDOFLINE	File end of line delimiter in EDI1214 file	SYS
EDI1214_SYSTEM	T for test P for Prod	SYS
EDI_CN_ENTITY_CODE	Consignment Entity code for Invoice XML	SYS
EDI_INVOICE_MSG_TYPE	Invoice Message type for Invoice XML	SYS
EDI_MESSAGE_VERSION	Message Version for Invoice XML	SYS
EDI_SH_ENTITY_CODE	Shipment Entity code for Invoice XML	SYS
EDI_STRUCTURE_VERSION	Structure version for Invoice XML	SYS
EFX_CANC_ARCH	Archive folder for EFX cancellation requests	SYS
EFX_CANC_FTP_DESTINATION_DIRECTORY	Directory for FTP of Microlise Files	SYS
EFX_CANC_FTP_DESTINATION_IP_ADDRESS	IP for FTP of Microlise Files	SYS
EFX_CANC_FTP_DESTINATION_PASSWORD	Password for FTP of Microlise Files	SYS
EFX_CANC_FTP_DESTINATION_PORT	Port for FTP of Microlise Files	SYS
EFX_CANC_FTP_DESTINATION_USERNAME	Username for FTP of Microlise Files	SYS
EFX_DEADLINE_HOURS	EFX Default Deadline Hours	SYS
EFX_DEFAULT_CARRIER	EFX Default Carrier	SYS
EFX_DEF_WEIGHT	Default EFX weight per RPE, used in calculation of trip weight for EFX export	SYS
EFX_EXCLUDE_CARR_TYPE_DEB	EFX Exclude Carrier Type from Debrief Messages	CO
EFX_EXT_LOCATION_NAME	Include the extra location name in the EFX messages (Y/N)	SYS
EFX_FAILURE_PATH	File path for failed EFX filed	SYS
EFX_FORMAT	EFX Format	SYS
EFX_FTP_DESTINATION_DIRECTORY	Directory for FTP of Microlise Files	SYS
EFX_FTP_DESTINATION_IP_ADDRESS	IP for FTP of Microlise Files	SYS
EFX_FTP_DESTINATION_PASSWORD	Password for FTP of Microlise Files	SYS
EFX_FTP_DESTINATION_PORT	Port for FTP of Microlise Files	SYS
EFX_FTP_DESTINATION_USERNAME	Username for FTP of Microlise Files	SYS
EFX_IDENTIFIER	EFX file identifier	SYS
EFX_INBOUND_LISTING_NAME	Filename for list of files in directory for EFX XML Trip Inbound	SYS



Parameter	Description	
EFX_INC_TRIP_VEH_TYPE	Include the vehicle type for the trip stop from EFX (Y/N)	COS
EFX_LISTING_SCRIPT_NAME	Script name for EFX XML Inbound	SYS
EFX_PATH	File path for EFX Inbound messages	SYS
EFX_PROCESSED_PATH	File path for processed EFX files	SYS
EFX_SEND_SUB	Send Sub-Contracted Trips to EFX when they go to ACCEPTED status	SYS
EFX_TRIP_ARCH	Archive folder for EFX requests	SYS
EFX_TRIP_DTL_PATH	File path for EFX Trip detail messages.	SYS
EFX_XML_DEB_DELAY	EFX XML Outbound second debrief message delay in minutes	SYS
EFX_XML_DEB_TRIP_STATUS	Determine which trip status generates debrief messages to EFX	COS
EFX_XML_INC_COUNTRYCODE	Will XML messages for EFX include COUNTRYCODE for load and drop locations (Y/N).	COS
EFX_XML_SYSTEM	EFX XML Outbound System Name	COS
EFX_XML_TYPE	EFX Type	COS
EFX_XML_UOM	EFX XML Outbound UOM	COS
ELUCID_API_PROXY	Proxy Sever Elucid	SYS
ELUCID_WS_ADDRESS	Elucid WS Address	SYS
ELUCID_WS_PWD	Elucid WS User	SYS
ELUCID_WS_USER	Elucid WS User	SYS
EMAIL_ACTUALS_FAILURE	Email address for Actuals Failure Email	CUS
EMAIL_CUSTOMER_CARE	Customer Care email address	SYS
EMAIL_CUST_SERVICES_RECIPIENT	The address for the recipient of the emails.	COS
EMAIL_OWN_PACKAGE	Is an e-mail required for an order that contains own packaging (Y/N)?	COS
ENABLE_SEND_BORDERO	Send Bordero Messages	CUS
ENGINE_RUNNING	Indicates whether the Scheduling Engine is running	SYS
EPL_CUST_REF	VPF Test param for 317770	SYS
EPOD_COLLECT_STOCK	To exclude sending a loading stop to EPOD which does not have an order for van stock or to fit new tyres(Y/N)	SYS
EPOD_COMPLETED_UPDATE	Are epod updates sent for COMPLETED trips?	SYS
EPOD_COMPLETE_ON_LOAD_UPDATE	Complete Trip when RTD job sent back from C-ePOD for load updates	COS
EPOD_COMPLETE_ON_RTD	Complete Trip when RTD job sent back from C-ePOD	COS
EPOD_CONCATENATE_JOB_INSTR	Concatenate the special instructions and the order comments for the collection/delivery location as the job instructions (Y/N).	COS
EPOD_CONSOLIDATION_LEVEL	Level of job consolidation for C-ePOD	COS
EPOD_CONTACT_DELIMITER	EPOD contact delimiter	COS
EPOD_CONTAINER_CODE1	What populates this field in EPOD DIMS for dimensions(default) or PARTS for the part numbers if present	COS
EPOD_CONTAINER_CODE2	What populates this field in EPOD DIMS for dimensions or PARTS for the part numbers if present (default)	COS
EPOD_CONTAINER_CODE3	What populates this field in EPOD DIMS for dimensions or PARTS (for the part numbers if present) default NULL	COS
EPOD_CONTAINER_DESCRIPTION	What populates this field in EPOD COMMODITY for the item commodity(default) DESCRIPTION for item desc or PROD_DESC for the prod AKA code and item desc	COS
EPOD_CUSTOMER_INVOICE	Include an EPOD_CUSTOMER_INVOICE section within the EPOD_CUSTOMERS section for the	SYS



Parameter	Description	
	service jobs (Y/N)	
EPOD_CUSTOMER_INVOICE_SXU	To include the EPOD_CUSTOMER section	SYS
EPOD_IGNORE_COL_SIG_DEPOT	Controls if signatures are ignored for cols at depots	COS
EPOD_IGNORE_COL_SIG_DEPOT	Controls if signatures are ignored for cols at depots	SYS
EPOD_ITEM_LEVEL	Send Containers (IC for items or LC for lines) or Products (IP for item or LP for lines) to EPOD	SYS
EPOD_JOB_GROUP_FORMAT	Indicates whether the value passed in the EPL Job Group to EPOD is the Cost Centre (CC), Carried ID (CI), Customer Group (CG) or Customer (CU).	SYS
EPOD_JOB_RETAIN_TIMES	Retain the actual times for the trip stop for the job (Y/N).	COS
EPOD_OWNER_CONFIG	C-ePOD Owner Configuration	COS
EPOD_PREVENT_ASSET_TRACK	Prevents asset tracking through EPOD	COS
EPOD_SEND_CLOSING_TIME	Send Location closing time to C-ePOD	SYS
EPOD_SEND_COD_NAME	Send COD Name to C-ePOD values will be (Y/N)	COS
EPOD_SEND_CONTACT_INFO	Send Contact information to C-ePOD	COS
EPOD_SEND_DRIVER	Is the driver username included? (Y/N)	SYS
EPOD_SEND_EPL_LAT_LONG	Send EPL_LAT and EPL_LONG for job addresses (Y/N)	COS
EPOD_SEND_EQUIPMENT	Controls if equipment requirements are sent to EPOD	SYS
EPOD_SEND_ITEM_AKA_CODE	Send EPL_PRODUCT_CODE with the item AKA code (Y/N)	COS
EPOD_SEND_LOADING_TYPE	Send Loading Type to C-ePOD	COS
EPOD_SEND_RVA_UNIT_TYPE	Send EPL_UNIT_TYPE as the vehicle configuration ID for the services (Y/N)	COS
EPOD_SET_ACTUAL_SIGNATORY_BLANK	Set C-ePOD actual signatory to blank (Y/N)?	SYS
EPOD_SIGNATORY	Controls if signatory is stored from C-ePOD	COS
EPOD_SIGNATURE_STORAGE	Store signature received from C-ePOD	COS
EPOD_SITE_ID_FORMAT	Indicates whether the value passed in the EPL Site ID to C-ePOD is the Database Name(DB), Cost Centre (CC) or Carrier ID (CI).	SYS
EPOD_TNC_STORAGE	Store TNC declaration from C-ePOD	COS
EPOD_UPDATE_ETA	Update Later stops ETA on receipt from C-ePOD	COS
EPOD_VIEW_POD_URL	URL for C-ePOD Documents	SYS
EPOD_WS_ADDRESS	C-ePOD Web Service End Point	SYS
EPOD_WS_ADDRESS_NHSPRD	C-ePOD Web Service End Point	SYS
EPOD_WS_MESSAGE_FORMAT	C-ePOD message format - can either be PARCEL, BULK, RETAIL, MODE1, MODE2 or DELTYPE to define where fields are sent in the web service message	SYS
EPOD_WS_PASSWORD	C-ePOD Web Service Login Password	SYS
EPOD_WS_TIMEOUT	Number of minutes before a WS message will be set to Held	SYS
EPOD_WS_USERNAME	C-ePOD Web Service Login Username	SYS
ETA_LOAD_TIME	Load time in minutes to be used in ETA calculation	SYS
EXE_ARCH_DIRECTORY	Destination directory EXE rcv	SYS
EXE_DESTINATION_DIRECTORY	Destination directory EXE rcv	SYS
EXE_DESTINATION_IP_ADDRESS	Destination for EXE rcv	SYS
EXE_DESTINATION_PASSWORD	Password for EXE rcv	SYS
EXE_DESTINATION_USERNAME	Username for EXE rcv	SYS
EXE_SOURCE_DIRECTORY	Source directory for EXE rcv	SYS
EXTERNAL_CALL_LOGGING	Call Logging External User	SYS
FASTER_SCANNING	Controls if the Planner splits order for planning	SYS
FC_ACCESS_TOKEN	The FleetCheck Access Token, provided by FleetCheck.	SYS
FC_FLEET_KEY	The FleetCheck fleet being updated by C-TMS.	SYS



Parameter	Description	
FC_TIMEOUT	The amount of time to wait when trying to update FleetCheck.	SYS
FC_URL	The base URL for the FleetCheck system.	SYS
FILE_INTERFACE_DIR	File Interface Directory	SYS
FINDTRIP_URL	Find trip webservice URL	SYS
FIT_PRESSURE_HIGH	FIT Report: Pressure Analysis High	SYS
FIT_PRESSURE_LOW	FIT Report: Pressure Analysis Low	SYS
FIT_PRESSURE_VHIGH	FIT Report: Pressure Analysis Very High	SYS
FIT_PRESSURE_VLOW	FIT Report: Pressure Analysis Very Low	SYS
FIT_TREAD_REPLACE_NEXT	FIT Report: RTD in Next Month	SYS
FIT_TREAD_REPLACE_NEXT2	FIT Report: RTD in Next 2 Months	SYS
FIT_TREAD_REPLACE_NOW	FIT Report: RTD in Current Month	SYS
FIXED_IMPORT	Customer is using fixed order import	CUS
FIX_NULL_BOOKING_REF	Set booking Ref to Null for fixed schedules	CO
FLEXIPOD	Set to Y to indicate the Flexipod interface is active	SYS
FLEXIPOD_CARRIERS	Set to Y indicates the Carrier can control if a trip is sent to Flexipod	SYS
FLEXIPOD_CLIENTNUM	Flexipod ClientNum sent in interface	SYS
FLEXIPOD_DEPOTS	Set to Y indicates the Depot can control if a trip is sent to Flexipod	SYS
FLEXIPOD_DROP	Determines the Drop level STOP-OMS or ITEM	SYS
FLEXIPOD_PASSWORD	Flexipod Webservice password	SYS
FLEXIPOD_SCAN_LEVEL	1,2 or 3 to indicate line or item level scanning	SYS
FLEXIPOD_SCAN_TYPE	Contents and items	SYS
FLEXIPOD_SPLIT	Are orders to be split?	SYS
FLEXIPOD_SYSTEM	Flexipod SYSTEM ID sent in interface	SYS
FLEXIPOD_USERCODE	Flexipod Webservice usercode	SYS
FLEXIPOD_USERNAME	Flexipod Webservice username	SYS
FLEXIPOD_WEBSERVICE	Flexipod webservice endpoint URL	SYS
FLEXIPOD_WEBSERVICE_TASK	Flexipod webservice endpoint URL for Tasks	SYS
FLEXIPOD_WEBSERVICE_UI	Flexipod webservice endpoint URL	SYS
FORCE_ITEM_SCAN	Is driver required to scan at debrief?	SYS
FORMS_ALERT_MESSAGE_MODULE	Alert Messages Form	SYS
FORMS_CS_PATH	Forms Client Server Path	SYS
FORMS_DEFAULT_MODULE	Default Module accessed when C-TMS is started - ORI_STATS, ORI_STATS_JRL or ORI_STATS_WATERFALL	SYS
FORMS_DEFAULT_ORDERS_MODULE	Default Orders Form - ORDERS_WIDE, ORDERS or ORD_ENTRY_TARGET	SYS
FORMS_DEFAULT_TRIP_MODULE	Default Trip Form - TRIPSUM or TRIPSUM_JRL	SYS
FORMS_PASSWORD_MODULE	Password Change form.	SYS
FORMS_PATH	Forms Path	SYS
FORMS_WEB_PATH	Determines where on the server forms are being obtained from for this database	SYS
FORMS_WEB_PATH_BLUE	Blue forms	SYS
FTP_SERVER_LOG	Create server logs for FTP send to prove delivery	SYS
FTP_TRANSMIT_TIME_LIMIT	Determines the time limit (in minutes) above which a file being transferred is considered to be failed instead of pending.	SYS
FTP_WRITE_LOC	FTP Write location	SYS
FULL_LOAD_GROUPAGE_FLAG	Controls whether Full load \ Groupage flag is checked when changing Trip status	SYS
FULL_LOAD_THRESHOLD	Maximum weight threshold for any FTL	SYS
GEL_DU	Identifies which du types include GEL	CO
GEO_ASKGEO_PROXY	Proxy server setting for AskGEO web server	SYS



Parameter	Description	
GEO_ASKGEO_TIMEOUT	AskGEO web server time out	SYS
GEO_ASKGEO_URL	AskGEO web server URL	SYS
GEO_DEFAULT_COUNTRY	Default country for new locations	SYS
GEO_DEFAULT_DEPOT	Default depot for new locations	SYS
GEO_DEFAULT_LOAD_RATE	Default Loading Rate for locations.	SYS
GEO_DEFAULT_SESSION_COUNTRY	Default Country Code for locations created from sessions	SYS
GEO_DEFAULT_UNLOAD_RATE	Default Unloading Rate for locations.	SYS
GEO_DRIVE_TIME_DTL_ONLY	Allows TRANSIT DAYS to be overridden by Drive Time in GEO_NET, YES or NO.	SYS
GEO_DT_ADDR_FMT	Determines the format of the Address string passed to external Map application, e.g. MapPoint, for Address Location Matching	SYS
GEO_DT_CALC	Determines the distance and time calculation methods - NET, NETR, LINE, PCMS	SYS
GEO_DT_CALC_ORD	Determines distance calculation method for orders	COS
GEO_DT_CALC_PAR_INT	Override for dist/time method for Paragon Interface	SYS
GEO_DT_DFLT_SPEED	Default truck speed assumed in approximation of driving time.	SYS
GEO_DT_DISTANCE_FACTOR	"Wiggle" factor applied to straight-line distance to approximate Road distance.	SYS
GEO_DT_DISTANCE_UNITS	Current distance unit - miles or kilometres	SYS
GEO_DT_DISTANCE_UNITS	Current distance unit - miles or kilometres	COS
GEO_DT_PCMS_TIMEOUT	Number of seconds to wait for PCMS to calculate distance and time.	SYS
GEO_DT_PCMS_TIMEOUT_ORD	Number of seconds to wait for NAVTEQ for order distance calculation	COS
GEO_HERE_DISTANCE_TYPE	Set to either miles or leave blank	COS
GEO_HIDE_SWAP_LOCATIONS	It is to exclude SWAP locations from list of Location_ID in location maintenance screen	SYS
GEO_KEEP_LATLONG	Keep Lat-Long when entered	SYS
GEO_LOCATION_STACK	Switch on stack specific location fields	SYS
GEO_LOC_ADD1_MAND	Address Line 1 must be entered	SYS
GEO_LOC_CUST_CTRY	Enable a customer to be specified for a location to be maintained for one of multiple countries? (?Y/N)	SYS
GEO_LOC_IMP_POST_PLAN	Populate the postal and planning regions using rules in country and static data when doing location import	SYS
GEO_LOC_PCDE_MAND	Post code must be entered	SYS
GEO_LOC_RADIAL_ROUTES	Indicates if a radial route will be stored for the location based on the fixed route stop for collection/delivery (Y/N).	SYS
GEO_LOC_TOWN_MAND	Town must be entered	SYS
GEO_MAX_INVENTORY	Maximum inventory threshold for warning	SYS
GEO_MIN_INVENTORY	Minimum inventory threshold for warning	SYS
GEO_NAVTEQ AJAX_LOGIN	NAVTEQ Ajax Login	SYS
GEO_NAVTEQ_CITY_SPEED	City Road Speed for NAVTEQ	SYS
GEO_NAVTEQ_COUNTRY_SPEED	Country Road Speed for NAVTEQ	SYS
GEO_NAVTEQ_FAST_SHORT	Fastest or Shortest Method for NAVTEQ Route calculation	SYS
GEO_NAVTEQ_JAVA	NAVTEQ Java	SYS
GEO_NAVTEQ_LOGIN	NAVTEQ Login	SYS
GEO_NAVTEQ_MAP_DIR	NAVTEQ Maps Folder	SYS
GEO_NAVTEQ_MAP_SHOW	NAVTEQ Maps Folder for WEBSHOW	SYS
GEO_NAVTEQ_MOTOR_SPEED	Motorway Speed for NAVTEQ	SYS
GEO_NAVTEQ_PROXY	Proxy Sever for NAVTEQ	SYS
GEO_NAVTEQ_URL_LOC	NAVTEQ Location URL	SYS



Parameter	Description	
GEO_NAVTEQ_URL_MAP	NAVTEQ Map URL	SYS
GEO_NAVTEQ_URL_MAP_ALL	NAVTEQ Map URL	SYS
GEO_NAVTEQ_URL_ROUTE	NAVTEQ Route URL	SYS
GEO_NET_TABLE	Network Table	SYS
GEO_NLP_ALT_PROXY	Proxy Sever for NLP 11g	SYS
GEO_NLP_ALT_URL_LOC	Alternative URL for Geocode service on NLP system	SYS
GEO_NLP_ALT_URL_ROUTE	Alternative URL for Calculate Route service on NLP system	SYS
GEO_NLP_API_KEY	API Key for NLP	SYS
GEO_NLP_APP_LOC	App_ID for Geo Code call to NLP system	SYS
GEO_NLP_APP_MAP	App for Map service on NLP system	SYS
GEO_NLP_APP_ROUTE	App_ID for Route call to NLP system	SYS
GEO_NLP_CAR_TRUCK	Nokia travel time calculations to be based on a truck or a car	SYS
GEO_NLP_DISTRICT_PARAM	Control which field (TOWN/LINE3) is sent as district to Nokia	SYS
GEO_NLP_FORMAT_FREETEXT	NLP Freetext Format	SYS
GEO_NLP_FORMAT_QUALIFIED	NLP Qualified Format	SYS
GEO_NLP_JAVA	Java for NLP to create PDF	SYS
GEO_NLP_JS_MULTI	Location for the show map multiple map printout in JavaScript	SYS
GEO_NLP_LATLONG_ACCURACY	NLP Geocode Accuracy	SYS
GEO_NLP_MAP_DIR	Directory for PDF of maps	SYS
GEO_NLP_MAP_SHOW	Directory for PDF of maps	SYS
GEO_NLP_MOTORWAY	Motorway Preference for NLP distance calculations	COS
GEO_NLP_PROXY	Proxy Sever for NLP	SYS
GEO_NLP_TOKEN_LOC	NLP Geocode Token	SYS
GEO_NLP_TOKEN_MAP	Login token for Map service on NLP system	SYS
GEO_NLP_TOKEN_ROUTE	Login token for Calculate Route service on NLP system	SYS
GEO_NLP_URL_LOC	Nokia Location Platform Geocode URL	SYS
GEO_NLP_URL_MAP	URL for Map service on NLP system	SYS
GEO_NLP_URL_ROUTE	URL for Calculate Route service on NLP system	SYS
GEO_NLP_USE_ALTERNATE	Use Alternative URLs and Proxy	SYS
GEO_POP_PLANNING_REGION	Controls whether the Planning Region is populated from the look up table - Y or N.	SYS
GEO_SLOT_IMPORT_FILE	Name of Slot Import file	SYS
GEO_SLOT_IMPORT_PATH	Slot Import path	SYS
GEO_SUBURB	Town must match a Zone	SYS
GEO_TOMTOM_ACCOUNT	TomTom account	SYS
GEO_TOMTOM_ARCH_DAYS	Number of days to keep the TomTom data before archiving	SYS
GEO_TOMTOM_AUTO_AREA_RADIUS	Radius (m) of temporary TomTom areas	SYS
GEO_TOMTOM_FENCE_CARR	List of carriers to test TomTom Geo-fence breaks	SYS
GEO_TOMTOM_FENCE_VAR	Variation of time in hours from planned for TomTom Geo-fence breaks to update stop	SYS
GEO_TOMTOM_FENCE_VEH	List of vehicles to test TomTom Geo-fence breaks	SYS
GEO_TOMTOM_GETMSGGS_URL	TomTom web service	SYS
GEO_TOMTOM_LATE_MINS	TomTom Late Reason Variance Minutes	SYS
GEO_TOMTOM_LATE_REASON	TomTom Late Reason Code	SYS
GEO_TOMTOM_ORDER_DEBRIEF	List of Delivery types allowing change	CAR
GEO_TOMTOM_PASSWORD	TomTom password	SYS
GEO_TOMTOM_PROXY	Proxy server setting for TomTom web server	SYS
GEO_TOMTOM_SENDORD_URL	TomTom web service to send orders	SYS
GEO_TOMTOM_SEND_CUST_REF	Send order customer ref to TomTom	SYS



Parameter	Description	
GEO_TOMTOM_TIMEOUT	TomTom web server time out	SYS
GEO_TOMTOM_TRIP_COMPLETE	TomTom to automatically complete trips	SYS
GEO_TOMTOM_TRIP_EN-ROUTE	Set trip status to EN-ROUTE from TomTom	SYS
GEO_TOMTOM_USERNAME	TomTom username	SYS
GEO_VALIDATE_LOCATION_NAME	Indicates whether the system should check for duplicate location names (as well as IDs) when creating/updating locations	SYS
GLO_CUSTOMER	Customer for Unilever Gloucester	SYS
GLO_FTP_DESTINATION_DIRECTORY	Directory for FTP of Unilever Files	SYS
GLO_FTP_DESTINATION_IP_ADDRESS	IP for FTP of Unilever Files	SYS
GLO_FTP_DESTINATION_PASSWORD	Password for FTP of Unilever Files	SYS
GLO_FTP_DESTINATION_PORT	Port for FTP of Unilever Files	SYS
GLO_FTP_DESTINATION_USERNAME	Username for FTP of Unilever Files	SYS
GLO_INBOUND_ARCH	Path for processed XML files that have successfully completed processing, see: int_po_inbound_header (Unilever)	SYS
GLO_INBOUND_FAIL	Path for processed XML files that have failed processing for reasons described against int_po_inbound_header (Unilever)	SYS
GLO_INBOUND_PATH	Path for yet to be processed XML files (Unilever)	SYS
GLO_LOCATION	Location for Unilever Gloucester	SYS
GLO_OUTBOUND_ARCH	Path for processed XML files for Unilever	SYS
GLO_OUTBOUND_FAIL	Path for processed XML files for Unilever that have failed processing	SYS
GLO_OUTBOUND_PATH	Path for yet to be processed XML files for Unilever	SYS
HIGHLIGHT_SMS_EMAIL	Highlight order Green if SMS or email notification required	COS
HKP_Clear_Archive_Messages	Age of ARCHIVED messaging records that are to be cleared.	SYS
HKP_Clear_Messages	Age of messaging records that are to be cleared.	SYS
HTTPS_CALL	It is related to switching from HTTP to HTTPS	SYS
HTTPS_PASSWORD	The password for URL commands in the database.	SYS
HTTPS_WALLET_FILE	The wallet file for URL commands in the database.	SYS
HTTP_WALLET_TOMTOM	Location of wallets for TOMTOM https	SYS
ICE_DU	Identifies which du types include ICE	COS
IGGESUND_IDENTIFIER	Identifier for IGGESUND inbound order files	SYS
IGGESUND_LISTING_NAME	List for IGGESUND files	SYS
IGGESUND_LISTING_SCRIPT_NAME	KSH for IGGESUND files	SYS
IMP_BWSC_DEF_CARRIER	Default Carrier for BWSC import for self delivery suppliers	COS
IMP_CARRIER_LANE_COUNTRY_CODE	Country code for each cost centre imported on Carrier_Lane - INDUSTRIAL	COS
IMP_CHANGE_DECIMALS	Correct commas and decimal points for Dimensions	CUS
IMP_COL_DATE_REQD	Collection Date must be specified for imports	COS
IMP_CREATE_ITEM_ID	Controls if Item identifiers are system generated in CSV	CUS
IMP_FULL_LOC_ADDR_MATCH	Check the addresses match for the location name, address line 1, postcode, country and type for imported orders before creating a new location (Y/N).	SYS
IMP_LOC_ID_ONLY	Only validate the location id when importing orders not the address lines	SYS
IMP_OVERRIDE_SOURCE_REF	Set source system and control additional functionality in ORD_LINE_ITM CSV order import	SYS
IMP_RESET_ORD_WINDOWS	Reset Order windows during Import	COS
IMP_RESET_ORD_WINDOWS	Reset Order windows during Import	CUS
IMP_TI_ORDER_CALC_WEIGHTS		COS



Parameter	Description	
	CSV Import - Calculate weights from $\text{dims}(Y=X*Y*Z/6000)$	
IMP_TI_ORDER_CHECK_SMS	CSV Import - Check contact numbers can be used as SMS numbers	COS
IMP_TI_ORDER_DEFAULT_DU	CSV Import - Default DU Type Method	COS
IMP_TI_ORDER_GEN_ITEMS	CSV Import - Generate order items from Qty	COS
IMP_TI_ORDER_GEN_LOC	CSV Import - Location Name generation by Post Code	COS
IMP_TI_ORDER_QTY_ADD	CSV Import - Add line qty	COS
IMP_TI_ORDER_REVENUE_LIMIT	CSV Import -Pre-call above revenue limit (Numeric Limit).0 means no pre-call	COS
IMP_TI_ORD_GEN_LOC_NAME	Send Supplier Collection Messages	CUS
IMP_USE_DEFAULT_DU	Use Default DU Type in import	CUS
IMP_USE_DEFAULT DU	Use Default DU Type in import	CUS
IMP_USE_GERMAN_DECODE	Controls if location names are decoded from German	SYS
INBOUND_ARDO_IDENTIFIER	Identifier for MTS PO Inbound Ardo files	SYS
INBOUND_ARDO_LISTING_NAME	Listing file for Ardo inbound XML files	SYS
INBOUND_ARDO_SCRIPT_NAME	Command file for Ardo inbound XML files	SYS
INBOUND_BEIG2_IDENTIFIER	Identifier for MTS PO Inbound DAI_TMS_BEIG_ORD_YYYYMMDDHHMMSSII.XML	SYS
INBOUND_BEIG2_LISTING_NAME	Listing file for BEIG inbound XML files	SYS
INBOUND_BEIG2_SCRIPT_NAME	Command file for BEIG inbound XML files	SYS
INBOUND_BEIG_IDENTIFIER	Identifier for MTS PO Inbound DAI_TMS_BEIG_ORD_YYYYMMDDHHMMSSII.XML	SYS
INBOUND_BEIG_LISTING_NAME	Listing file for BEIG inbound XML files	SYS
INBOUND_BEIG_SCRIPT_NAME	Command file for BEIG inbound XML files	SYS
INBOUND_FAILURES_PATH	Path for failed inbound files	SYS
INBOUND_GLO_IDENTIFIER	Identifier for MTS PO Inbound Unilever files	SYS
INBOUND_GLO_LISTING_NAME	Listing file for GLO inbound XML files	SYS
INBOUND_GLO_LOA_IDENTIFIER	Identifier for MTS PO Inbound Unilever LOA files	SYS
INBOUND_GLO_SCRIPT_NAME	Command file for GLO inbound XML files	SYS
INBOUND_POM_IDENTIFIER	Identifier for MTS PO Inbound MTS_POMI_<YYYYMMDDHH24MISS>_<10 DIGIT SEQ>.XML	SYS
INBOUND_POM_LISTING_NAME	Listing file for POM inbound XML files	SYS
INBOUND_POM_SCRIPT_NAME	Command file for POM inbound XML files	SYS
INBOUND_PROCESSED_PATH	Path for processed inbound files	SYS
INBOUND_UNI_IDENTIFIER	Identifier for MTS PO Inbound Unilever files	SYS
INBOUND_UNI_LISTING_NAME	Listing file for UNI inbound XML files	SYS
INBOUND_UNI_SCRIPT_NAME	Command file for UNI inbound XML files	SYS
INCLUDE_CDATA_TAG	Use CDATA tag around XML tags values and allowed values will be (Y/N) which will be used to control escaping of special characters like &	SYS
INCLUDE_FAILED_ORDERS	Include Failed Orders as CANCELLED for API	COS
INCL_ROUTE_CODE	Include Baxter Route code and delivery method	COS
INCOMPLETE_ORDERS_WARNING	Display warning message on trip status change if no order items exist	COS
INHERIT_LAT_LONG	Inherit Lat/Long details from parent address	CUS
INNER_OUTER_DU	Inner and outer du types for rating	COS
INTERFACE_FORMAT	Controls the interface format for inbound orders	SYS
INTERFACE_INBOUND_PATH	Path for Inbound files	SYS
INT_ADD_MOD43_CD	Store the Modulo 43 check digit as a suffix for the order item for the barcode label (Y/N).	COS
INT_ADD_MOD43_CD	Store the Modulo 43 check digit as a suffix for the order item for the barcode label (Y/N).	CUS
INT_ALTERNATE_DB	Determines if alternate_db is used as a condition in the INT_MSG code	SYS



Parameter	Description	
INT_CARRIER_DET	Used to control which carrier details cursor is fetched in INT_MSG.PROCESS_TRIP_DTL_MSG	SYS
INT_CHARGES	Determines whether internal charging is based on COST_CENTRE or GROUP_NAME	SYS
INT_DECODE_UNISON	Used to control which DECODE_VALUE is used in INT_MSG	SYS
INT_DROP_POSTCODE	Determines how v_string is built within INT_MSG.PROCESS_EFX_TRIP_DTL_MSG part of INT_MSG alignment	SYS
INT_ERRNUM	Used to establish whether error numbers should be inserted into VALIDATION_ERROR in INT_MSG	SYS
INT_IGNORE_DESP_QTY	Send despatch messages even when despatch quantity is not set	SYS
INT_KEEP_FILE	Do not remove files from delivery folder	SYS
INT_MSG_TYPE	Determines whether a cursor is fetched or a hard coded if IN the INT_MSG.READ_BBOKING_HEADER procedure. Part of Alignment process.	SYS
INT_ORDER_COMMENT	Indicates if the order_comments in INT_MSG.PROCESS_UNSION_FILE is selected as a substring	SYS
INT_ORDER_CORRECT	Indicates if interface files are corrected	SYS
INT_READ_EFX_COMMENTED_OUT	Indicated if code is commented out in EFX procedure of INT_MSG part of alignment	SYS
INT_READ_EFX_CURSOR	Indicates if C_EFX_TRIPS cursor is based on trip or load part of INT_MSG alignment	SYS
INT_REVERSE_DECODE	Indicates if INT_MSG.PROCESS_EXE_OUTBOUND_FILE requires a call to IMP_REVERSE_DECODE in the current database	SYS
INT_TRAILER_TYPE	DECODE or REVERSE to determine how trailer type is extracted in INT_MSG.PROCESS_EFX_TRIP_DTL_MSG	SYS
INT_TRANSHIP_POS	Used to determine TRANSHIP_IND is in the incoming file for INT_MSG.READ_BOOKING_DETAIL	SYS
INT_TRIP_STOP_DATE	Determines which date (LATE DEL or DEPART) is passed to the string in INT_MSG	SYS
INT_UNISON_ERRNUM	Indicates if errnum should be included when inserting data into validation_error field in INT_MSG.PROCESS_UNISON_FILE	SYS
INT_USE_NEW_DB	Determines which procedures within INT_MSG use the new database name	SYS
INT_XML_DAYS_PAST	Used to set how many days into the past the dp_pulse package should look for locked records	SYS
INVOICE_DIR	Directory for storing invoices when printed	SYS
INV_ACT_PMNTS_DAYS	Process payments for a set number of days prior to the period end date or the current date for the next invoice.	SYS
INV_SEARCH_FROM_OFFSET	Controls how many days in the past to default the from search in the INVOICES form.	SYS
INV_SEARCH_TO_OFFSET	Controls how many days in the future to default the from search in the INVOICES form.	SYS
INV_SET_PERIOD	Set the period for the invoice based on the current date (Y/N)	SYS
ISOTRAK_BATCH_JOB_SIZE	Number of job records that are processed each minute via the ISOTRAK interface	SYS
ISO_ENABLED	ISO enabled for this database	SYS
ISO_FTP_DESTINATION_DIRECTORY	Directory for FTP of ISOTRAK Files	SYS
ISO_FTP_DESTINATION_IP_ADDRESS	IP for FTP of ISOTRAK Files	SYS



Parameter	Description	
ISO_FTP_DESTINATION_PASSWORD	Password for FTP of ISOTRAK Files	SYS
ISO_FTP_DESTINATION_PORT	Port for FTP of ISOTRAK Files	SYS
ISO_FTP_DESTINATION_USERNAME	Username for FTP of ISOTRAK Files	SYS
ISO_INBOUND_ARCH	Path for inbound ISO XML archiving	SYS
ISO_INBOUND_FAIL	Path for ISO XML failures	SYS
ISO_INBOUND_IDENTIFIER	Pattern for ISO Trip Inbound XML	SYS
ISO_INBOUND_LISTING_NAME	Filename for list of files in directory for ISO XML Trip Inbound	SYS
ISO_INBOUND_PATH	Path for yet to be processed XML files from ISO	SYS
ISO_LISTING_SCRIPT_NAME	Script name for ISO XML Trip Inbound	SYS
ISO_OUTBOUND_ARCH	Path for archiving outbound ISO XML interfaces	SYS
ISO_OUTBOUND_FAIL	Path for failing outbound ISO XML interfaces	SYS
ISO_OUTBOUND_PATH	Path for outbound ISO XML interfaces	SYS
ISO_Queue_Name	ISOTRAK Queue Name	SYS
ISO_RECON_MODE	Determine whether messages should be deleted or reconciled, then delete or update as appropriate, ARCHIVE or DELETE	SYS
ISO_Sched_Prefix	ISOTRAK Schedule Prefix	SYS
ISO_Signature	ISOTRAK Signature	SYS
JAVAVM_PROFILE	javavm profile	SYS
KCC_DEL_INFO_PATH	File path for KCC Delivery Information Export	SYS
KER_LOADING_FTP_DIRECTORY	Specify the directory for the Kerridge Loading file	CO
KER_LOADING_FTP_FILENAME	Specify the Filename for the Kerridge Loading file	CO
KER_LOADING_FTP_IP_ADDRESS	Specify the IP Address for the Kerridge Loading file	CO
KER_LOADING_FTP_PASSWORD	Specify the Password for the Kerridge Loading file	CO
KER_LOADING_FTP_PATH	Specify the path for the Kerridge Loading file	CO
KER_LOADING_FTP_PORT	Specify the Port for the Kerridge Loading file	CO
KER_LOADING_FTP_USERNAME	Specify the Username for the Kerridge Loading file	CO
KER_WEB_PATH	URL for show web Kerridge Files	CO
LABEL_DIR	Directory for storing the labels when printed	CO
LABEL_FILE	Directory for storing the labels when printed	CO
LABEL_FILE_UNSCHEДУLED	The label format for when the order is UNSCHEDULED.	CO
LABEL_FORMAT	Label format for Orders	CO
LABEL_GROUP	Delivery Type for which labels will be printed	CO
LABEL_LOGO_FILE	Set label logo file	SYS
LANE_RATE_CHARGING	lane rates calc	CO
LAST_RELEASE_DATE	Last release for this database. NB. UPDATED_DATE (updated by trigger) stores the real value (see ORI_STATS). Change VALUE after each release.	SYS
LBO_CUTOFF_TIME_DEFAULT	Latest time by which a Lane Based Order must be places if Cut-off functionality is switched on	SYS
LBO_CUTOFF_TIME_ENABLE	LBO Cut-off times enabled - Y or N	SYS
LBO_FUTURE_ORDER_LIMIT_DAYS	Maximum number of days in future that LB Order can be created	SYS
LFE_API_AUTHORIZATION	Client Ref for authorisation	SYS
LFE_API_VERSION	11 for 11g, 12 for 12c	SYS
LICENCE_MONITOR_LEVEL	Licence monitor alert level	SYS
LINE_ITEM_TOTALS	Controls if service payments are generated	CO
LOADING_REPORT	NON Cost centre Loading Report	SYS
LOAD_LEVEL_PARAM	Level of data reported in the Load List	CO
LOCATION_DECODE_VALIDATION	Validate Addresses using decode values	CO
LOGINEXT_API_TOKEN	API Token for Loginext	SYS
LOGINEXT_ENDPOINT	Endpoint address for Loginext	SYS
LOGIX_ARCH_DIR	Folder for archive of Logix files	SYS



Parameter	Description	
LOGIX_CREATE_FILE	Create a file containing CLOB	SYS
LOGIX_DEL_PRIORITY_DAYS	Number of days before late delivery when prioritized in Route Optimiser	SYS
LOGIX_DIR	Folder for Logix files	SYS
LOGIX_MASTER_PROFILE	Profile for Logix API webservice	SYS
LOGIX_MASTER_WORK_AREA	LogiX Master Work area directory name	SYS
LOGIX_PASSWORD	Password for Logix API webservice	SYS
LOGIX_PROFILE	Profile for Logix API webservice	SYS
LOGIX_PROJECT	Project for Logix API webservice	SYS
LOGIX_PROXY	Proxy server name for Logix API webservice	SYS
LOGIX_RANGE	Range of schedules to send	SYS
LOGIX_RANGE_OLD	Range of schedules to send	SYS
LOGIX_SCHEDULE_MATRIX	How Many Days in the future to Recalculate Planned Transport?	SYS
LOGIX_SERVER_NAME	LogiX server name	SYS
LOGIX_SLOT_CUTOFF_TIME	Cut-off time for planning trunks in LogiX import	SYS
LOGIX_TIMEOUT	Timeout for Logix API webservice	SYS
LOGIX_URL	URL for Logix API webservice	SYS
LOGIX_USERNAME	Username for Logix API webservice	SYS
LOGNET_INT_DIR	LOGNET file path.	SYS
LOGO_FILE	Logo file	SYS
LOGO_FILE_BW	Logo file in Black and White for system usage (e.g. on labels).	SYS
LOGO_PATH	Site specific location of logo files	SYS
LOTS_ADD_DEBRIEF	LOTS Additional Debrief Details	COS
LOTS_DEL_CUST_SIGNATORY	Controls if DEL messages for LOTS require an actual signatory - Y to hold messages.	COS
LOTS_DEL_MSG_TRIP_STATUS_COMPLETE	Send LOTS DEL Message if trip status set to COMPLETE (Y/N)	COS
LOTS_EXPORT_TYRE	LOTS export tyre	COS
LOTS_FTP_DESTINATION_DIRECTORY	Final Destination directory for FTP of LOTS Files	SYS
LOTS_FTP_DESTINATION_IP_ADDRESS	IP for FTP of LOTS Files	SYS
LOTS_FTP_DESTINATION_PASSWORD	Password for FTP of LOTS Files	SYS
LOTS_FTP_DESTINATION_PORT	Port for FTP of LOTS Files	SYS
LOTS_FTP_DESTINATION_USERNAME	Username for FTP of LOTS Files	SYS
LOTS_FTP_PUT_DIRECTORY	Mid-Send directory for FTP of LOTS Files	SYS
LOTS_INBOUND_ARCH	Path for archiving inbound LOTS XML interfaces	SYS
LOTS_INBOUND_FAIL	Path for failing inbound LOTS XML interfaces	SYS
LOTS_INBOUND_IDENTIFIER	Pattern for LOTS Trip Inbound XML	SYS
LOTS_INBOUND_LISTING_NAME	Filename for list of files in directory for LOTS XML Trip Inbound	SYS
LOTS_INBOUND_PATH	Path for inbound LOTS XML interfaces	SYS
LOTS_INC_ORDER_HEADER_CONFIRM	Includes the ORDER_HEADER_CONFIRM section in the DEL file for LOTS.	SYS
LOTS_INC_STOP_SIGNATURE	Indicates if the STOP_SIGNATURE section will be displayed in the DEL outbound files to LOTS.	SYS
LOTS_INC_STOP_TYPE_DESC	Include STOP-TYPE_DESC tag in XML	SYS
LOTS_LISTING_SCRIPT_NAME	Script name for LOTS XML Trip Inbound	SYS
LOTS_MINI_LODGMNT_FILE	Lodgements	SYS
LOTS_OUTBOUND_ARCH	Path for archiving outbound LOTS XML interfaces	SYS
LOTS_OUTBOUND_FAIL	Path for failing outbound LOTS XML interfaces	SYS
LOTS_OUTBOUND_PATH	Path for outbound LOTS XML interfaces	SYS
LOTS_PREVENT_MULTI_VLI_VUI	Prevent multiple VLI and VUI files being sent to LOTS (Y/N).	SYS
LOTS_SEND_PLANNED		SYS



Parameter	Description	
	Allow TRP message to be sent to LOTS when trip is still at status Planned	
LOTS_SEND_WHEN_VEHICLE_SCANNED	List of LOTS message types that will be held until a vehicle scan is received for the order.	COS
LOTS_VERSION_NUMBER	LOTS Poller Version	SYS
LOTS_XFER_EXTENSION	Sets the LOTS transfer file extension	COS
LOWERCASE_REF	Allow lowercase bill of lading	COS
MAINTAIN_SCHEDULE_DATES	Use wholesale schedule dates	COS
MANF_RECIPIENT	Indicates the recipient type of the manifest	COS
MANF_REPORT	Indicates the name of the manifest report to be automatically generated when a trip is accepted	COS
MANF_REPORT	Driver Manifest Name	COS
MANIFEST_AT_ENROUTE_ONLY	Only Send XML manifest at En-Route status	CAR
MANIFEST_ORDERS	Indicates that the cost centre allows parent and child shipments to be imported	COS
MAX_LOCATION_INACTIVE_DAYS	Maximum number of days a location can remain inactive before being set to inactive automatically.	SYS
MAX_REPORT_PARAM_VALUES	Maximum number of multiple values that can be selected for extracts	SYS
MAX_VOLUME	Maximum Volume for any FTL	SYS
MAX_WEIGHT	Maximum weight for any FTL	SYS
MCS_AWB_REQUIRED	This flag control whether the AWB (Air Way Bill) is requested during the pallet building and despatch processes in C-MCS.	SYS
MCS_DESPATCH_DISPLAY_DROP	Display the Drop Number in the Despatch Screen	SYS
MCS_DESPATCH_TO_PLAN	Enforce the despatch scanning of packages and pallets to the planned trips? (Y/N)	SYS
MCS_DISPLAY_ADDITIONAL	Display items scanned from different trips in MCS despatch? (Y/N)	SYS
MCS_DISPLAY_COMMTYPE_HAZ	This flag controls whether commodity code and hazardous information is displayed against items and pallets in C MCS pallet building.	SYS
MCS_DISPLAY_PROD_TYPE	This flag controls whether the Product Type is displayed against items and pallets in C- MCS in receipt, despatch and pallet building.	SYS
MCS_DYNAMIC_PALLET_BUILDING	This flag controls whether to allow pallet building to occur while scanning items for despatch in the items screen	SYS
MCS_EXCEPTIONS_DAMAGED	MCS exceptions at Receipt (excluding FNR and LATE) and Despatch will be marked as damaged items and be removed from onward trips (Y/N).	SYS
MCS_FAST	This parameter will control the level of validation performed during MCS scanning.	SYS
MCS_FAST_VALIDATION	Is fast validation enabled	SYS
MCS_ITEM_DISPLAY_DU	This flag controls whether the DU type is displayed instead of the item type on item lists in MCS.	SYS
MCS_LOCATION_PROMPT	Prompt for Receipt Location at Receipt	SYS
MCS_MOVE_FULL_CONSIGNMENT	Move all items for an order during MCS split scanning.	SYS
MCS_NEW_DESPATCH_MODE	This flag controls whether the new Despatch screen is run	SYS
MCS_PALLET_LABEL_FORMAT	The format of pallet label produced by the pallet building option when printing pallet labels.	SYS
MCS_PREVENT_UNPLANNED	Prevent unplanned items being scanned for pallet building, despatch and receipt although expected for the route (Y/N)?	SYS
MCS_RECEIVE_TO_PLAN	Enforce the receipt scanning of packages and pallets to the planned trips? (Y/N)	SYS



Parameter	Description	
MCS_SET_PALLET_ID	MCS set item Pallet Id	SYS
MCS_TEMPERATURE_SCAN	Prompt for Temperature Type at MCS Despatch	SYS
MCS_TENDERED_ITEMS	This flag controls whether MCS items are generated at the change to TENDERED status as well as at ACCEPTED status, or just ACCEPTED status.	SYS
MCS_UPDATE_SCAN_IMMEDIATELY	Allow items to count as despatched immediately after scanning? (Y/N)	SYS
MSC_STD_STATUS_CHANGES	Do trips go to EN-ROUTE and COMPLETED auto? Affects Despatch only. N means set to ACCEPTED if at PLANNED or TENDERED, otherwise EN-ROUTE. Any other value means set to EN-ROUTE status.	SYS
MICD_DONT_SEND_DRVR_ID	Microlise Direct Don't send driver id	CO
MICD_EE_PATH_IN_IDENT	Pattern for MICD EventExport Inbound XML	SYS
MICD_JSE_PATH_IN_IDENT	Pattern for MICD JourneySummaryExport Inbound XML	SYS
MIC_3PL_TRIP_HOURS	The number of elapsed hours that Microlise requires a trip not to exceed.	SYS
MIC_ACTUAL_DISTANCE	Will Microlise receive an actual distance from Paragon for a trip (Y/N)?	SYS
MIC_ADD_STOP_BARCODE	Include new tag STOP_BARCODE on Microlise outbound xml	SYS
MIC_ALLOW_CREATE_ORDERS	Allow orders to be created	SYS
MIC_AUTO_CONFIRM_COLLECTION_ORDERS	Create Service Types via Microlise	CO
MIC_CALC_REASON_QTY	Set the item reason quantity to the despatched quantity if a reason code is provided with a quantity of 0 instead of an accurate quantity (Y/N).	CO
MIC_COLLECTION_ORDER_TASKS	Create ad hoc orders via Microlise	CO
MIC_CONSOL_ORDERS	Consolidate the orders for the Microlise outbound XML flow, if Y then the orders will be consolidated.	CO
MIC_CONSOL_STOPS	Consolidate the stops for the Microlise outbound XML flow, if Y then the stops will be consolidated.	CO
MIC_CREATE_CD	Microlise interface to create CD reason for successful deliveries when not provided	SYS
MIC_CREATE_FAILED_ORDERS	Controls if orders be set to FAILED status on inbound Microlise flow	CO
MIC_DEBRIEF_POC	Allow the collection orders to set their POC flag when they are confirmed with actual delivered quantities and generate a ORD_COLL_XML file? (Y/N)	CO
MIC_DEFAULT_DELIVER	Should the actual times be set to the planned ones upon receipt of a STA or DEP message	CO
MIC_DEFAULT_PRODUCT_TYPE	Create Service Types via Microlise	CO
MIC_DEFINE_GROUP_NAME	Group Name For Microlise Collection Orders	CO
MIC_DEF_COST	Cost Centre default	SYS
MIC_DEF_CUST	Customer ID default for Microlise	CO
MIC_DEF_DEL_TYPE	Default Del Type for empty orders	SYS
MIC_DEF_DU_TYPE	Du Type	SYS
MIC_DEF_PRODUCT	Product Type	SYS
MIC_DELETE_REASONS	Delete Reason codes before adding new reason codes.	CO
MIC_DEL_DAY_OFFSET	Delivery Day Offset	SYS
MIC_DIRECT_DEF_COST	Cost Centre default	SYS
MIC_DIRECT_FTP_DEST_DIRECTORY	Directory for FTP of Microlise Direct Files	SYS
MIC_DIRECT_FTP_DEST_IP_ADDRESS	IP for FTP of Microlise Files	SYS
MIC_DIRECT_FTP_DEST_PASSWORD	Password for FTP of Microlise Direct Files	SYS
MIC_DIRECT_FTP_DEST_PORT	Port for FTP of Microlise Direct Files	SYS
MIC_DIRECT_FTP_DEST_PROTOCOL	Protocol for FTP of Microlise Direct Files	SYS
MIC_DIRECT_FTP_DEST_USERNAME	Username for FTP of Microlise Direct Files	SYS



Parameter	Description	
MIC_DIRECT_PATH_IN	Inbound Directory for Direct Microlise XML	SYS
MIC_DIRECT_PATH_IN_ARCH	Archive Directory for Inbound Direct Microlise XML	SYS
MIC_DIRECT_PATH_IN_FAIL	Failure Directory for Inbound Direct Microlise XML	SYS
MIC_DIRECT_PATH_IN_IDENT	Pattern for MIC Trip Inbound XML	SYS
MIC_DIRECT_PATH_IN_LIST	Filename for list of files in directory for MIC Direct XML Trip Inbound	SYS
MIC_DIRECT_PATH_IN_SCRIPT	Script name for MIC Direct XML Trip Inbound	SYS
MIC_DIRECT_PATH_OUT	Outbound Directory for Direct Microlise XML	CO
MIC_DIRECT_PATH_OUT_ARCH	Outbound Archive Directory for Direct Microlise XML	SYS
MIC_DIRECT_SEND_CUSTOMER	Microlise direct will send customer group instead of carrier	SYS
MIC_DIRECT_SEND_ROUTE_CODE	Set Microlise direct to send route code in the Journey Alias field.	SYS
MIC_DIRECT_UPDATE_PRIORITY	Flag indicating priority for del/arr updates Manual, EventExport, PodPoc updates	CO
MIC_DISABLE_EMPTY_ITEM_STOPS	Allows disabling of stops with no items on	SYS
MIC_EXCLUDE_ASSET_ID	A comma-delimited list of prefixes that determines if the new asset ID will not be stored (e.g. for loose items).	SYS
MIC_EXCLUDE_UNPACKED_LINES	Exclude any order lines that have not been packed from the Microlise files (Y/N).	CO
MIC_EXTENDED_INSTRUCTIONS	Are extended instructions sent to MICROLISE	CO
MIC_FTP_DESTINATION_DIRECTORY	Directory for FTP of Microlise Files	SYS
MIC_FTP_DESTINATION_IP_ADDRESS	IP for FTP of Microlise Files	SYS
MIC_FTP_DESTINATION_PASSWORD	Password for FTP of Microlise Files	SYS
MIC_FTP_DESTINATION_PORT	Port for FTP of Microlise Files	SYS
MIC_FTP_DESTINATION_USERNAME	Username for FTP of Microlise Files	SYS
MIC_INBOUND_ARCH	Path for Microlise XML archiving	SYS
MIC_INBOUND_CONTINUE_ON_ERROR	Continue processing MICROLISE message if invalid items exist within the file? (Y/N)	CO
MIC_INBOUND_FAIL	Path for Microlise XML failures	SYS
MIC_INBOUND_IDENTIFIER	Pattern for MIC Trip Inbound XML	SYS
MIC_INBOUND_LISTING_NAME	Filename for list of files in directory for MIC XML Trip Inbound	SYS
MIC_INBOUND_PATH	Path for yet to be processed XML files from Microlise	SYS
MIC_INC_SERVICES	List of services to be sent out to Microlise	CO
MIC_LISTING_SCRIPT_NAME	Script name for MIC XML Trip Inbound	SYS
MIC_ORDER_FULFILLMENT	Send Additional Order Fulfillment values to Microlise.	CO
MIC_OUTBOUND_ARCH	Path for archiving outbound Microlise XML interfaces	SYS
MIC_OUTBOUND_FAIL	Path for failing outbound Microlise XML interfaces	SYS
MIC_OUTBOUND_PATH	Path for outbound Microlise XML interfaces	SYS
MIC_OWNING_DEPOT	Indicates if the Microlise file is sent with Database or owning depot in the name	SYS
MIC_PACKED_DESPATCHED	Only packed/despached lines and items sent to Microlise	CO
MIC_POCPOD_NON_DEPOT	Microlise to set POC/POD for non depot orders	CO
MIC_REDUCED_EVENTS	Will Microlise receive a reduced number of defined events (Y/N)?	SYS
MIC_RESOURCE_UPDATE	Update resources on receipt of Microlise message	CO
MIC_SEND_ACCEPTED	Send Microlise Trip message when status changed to ACCEPTED	SYS
MIC_SEND_ADDR_CONTACTS	Send Contacts to Microlise (DEP/DEL/BOTH)	CO
MIC_SEND_ADD_REF	Send Address references in Microlise XML flow	CO
MIC_SEND_ALL_CONTACTS	Send All Contacts to Microlise (Y/N)	CO
MIC_SEND_CHILDREN	Are child locations sent to Microlise	CO
MIC_SEND_COST	Send Costs in Microlise XML flow	CO



Parameter	Description	
MIC_SEND_DETAIL_ID	Send DETAIL_ID in the MIC XML flow	CO3
MIC_SEND_DIRECT	Flag indicating needing to send direct message to Microlise or not	CO3
MIC_SEND_EMPTY	Are empty resources sent to Microlise	SYS
MIC_SEND_HAULIER_TYPE	Include Haulier Type in outbound microlise flow	CO3
MIC_SEND_ORD_LINE_AND_ITEM	Send both Order Lines and Items to Microlise.	CO3
MIC_SEND_ORD_REF	Send Order sub references in Microlise XML flow	CO3
MIC_SEND_SUB_TYPE	Are VAN carriers indicated	CO3
MIC_SERVICE_TASKS	Create Service Types via Microlise	CO3
MIC_SET_TO_COMP_CONF	Set trip to P-Completed, F-Confirmed, N-Neither once Microlise has finished its updates	SYS
MIC_SHIPMENT_SO_REF	Is external ref included in the Shipment detail tag?	SYS
MIC_SO_REF	So_ref sent to MICROLISE is oms_ref concatenated with external_ref	SYS
MIC_SO_REF_FORMAT	Format for the SO_REF for Microlise for non-consolidated orders: 0 = Standard (Customer Ref), 1 = Type-SO_REF-Trip-Seq-Act (eg C-12345-MAN-1234-001-L)	SYS
MIC_SO_REF_FORMAT	Format for the SO_REF for Microlise for non-consolidated orders: 0 = Standard (Customer Ref), 1 = Type-SO_REF-Trip-Seq-Act (eg C-12345-MAN-1234-001-L)	CO3
MIC_SO_REF_FORMAT	Contingency Import setting	CO3
MIC_SUPPRESS_ORDER_SEGMENT	Only show orders against the stop for the final delivery	CO3
MIC_TRUNK_CONSOL	Are trunk trips consolidated to send to Microlise	CO3
MIC_UPDATE_ACTUALS_FROM_PODPOC	Update Actuals based on POD/POC Message.	CO3
MIC_UPDATE_TO_DELIVER	Update To Deliver based on Delivered Amount	CO3
MIC_USE_ALT_STOP_ID	Prefix stop id with route code for first and last stops	CO3
MIC_USE_PALLET_ID	Use Pallet ID in Microlise	CO3
MIC_USE_STOP_ID	Determines if the stop ID or the stop sequence will be used by Microlise, if Y then the stop ID will be used.	CO3
MIC_USE_STOP_ID	Determines if the stop ID or the stop sequence will be used by Microlise, if Y then the stop ID will be used.	SYS
MILK_ROUND_ORDERS	Allow orders to be added to Milk round Routes based on delivery information	CO3
MILK_ROUND_TRIP_GENERATION	Trips Generated using milk round processing	CO3
MINIMUM_COLLECTION	Are Minimum collection charges applicable at each stop	SYS
MINS_TRUNKS_ACCEPTED	How many minutes to auto accept trunk trips?	SYS
MIN_COLLECTION_CHARGE	Minimum Collection charge per stop	SYS
MIN_CONSIGNMENT_CHARGE	Minimum charge per consignment	SYS
MIS_CHAR_SET	Character set for MIS extracts	SYS
MIS_DELETED_DAYS	The number of days after which the data on the MIS_DELETED table will be removed.	SYS
MIS_DELETE_REQUIRED	Determines whether MSI table needs to be updated	SYS
MIS_FTP_ARCH_DIR	MIS FTP archive directory	SYS
MIS_FTP_DESTINATION_DIRECTORY	MIS FTP Dir	SYS
MIS_FTP_DESTINATION_IP_ADDRESS	MIS FTP IP	SYS
MIS_FTP_DESTINATION_PASSWORD	MIS FTP Password	SYS
MIS_FTP_DESTINATION_PORT	MIS FTP Port	SYS
MIS_FTP_DESTINATION_USERNAME	MIS FTP User	SYS
MIS_FTP_PROTOCOL	MIS FTP Protocol	SYS
MIS_TAB_DELIMITER	Use a tab as a delimiter for the MIS files (Y/N)?	SYS
MIXMOVE	Is MIMOVE interface enabled?	SYS
ML_REQUIRED	Whether database is multi-lingual.	SYS
MSC_STD_STATUS_CHANGES	Do trips go to EN-ROUTE and COMPLETED auto	SYS



Parameter	Description	
MSG_CONCAT_TIME_PERIOD	Message concatenation time period (minutes)	SYS
MSG_LOC_ORD_DEL_BY_DELIVERY	Set to Y if message body for event LOC_ORD_DEL is to show delivery details	SYS
MSG_NAKS	Send an email message for NAK responses (Y/N)	SYS
MSG_NAKS_EMAIL	The email recipient for a message for NAK responses	SYS
MSG_NAKS_TYPE	A list of NAK event types to send an email message	SYS
MSG_SCHEMA_URL	XSD Schema URL Path	SYS
MSG_SCHEMA_XSD	XSD Schema XSD Name	SYS
MSG_SENDER_TRIP_ACCEPT	The sending email address for a the trip accept message.	CO
MSG_SEND_HOURS_THRESHOLD	Threshold in hours before current date when Trip messages will still be sent (using trip start date)	SYS
MSG_SUBJECT_BKNG_DTL	Message Subject for Booking Detail message	SYS
MSG_SUBJECT_BKNG_DTL_L	Message Subject for Lane Booking Detail message	SYS
MSG_SUBJECT_CTM_AUTCHASE	Message Subject for Carrier Trip Management (CTM) Auto Chase Messages	SYS
MSG_SUBJECT_CTM_MANCHASE	Message Subject for Carrier Trip Management (CTM) Manual Chase Messages	SYS
MSG_SUBJECT_LANE_ACD_DTL	Message Subject for Lane Accepted Detail message	SYS
MSG_SUBJECT_LANE_ACPTD	Message Subject for Lane Accepted message	SYS
MSG_SUBJECT_LANE_ACPTD_A	Message Subject for Lane Accepted Amended message	SYS
MSG_SUBJECT_LANE_A_DTL_A	Message Subject for Lane Accepted Amended Detail message	SYS
MSG_SUBJECT_LOC_ORD_DEL	Message Subject for Pre-warning Order delivery message	SYS
MSG_SUBJECT_MANIFEST	Message Subject for Network Rail Manifest message	CO
MSG_SUBJECT_MANIFEST	Message Subject for Manifest message	SYS
MSG_SUBJECT_MANIFEST_A	Message Subject for Manifest Amended message	SYS
MSG_SUBJECT_MANIFEST_DTL	Message Subject for Manifest Detail message	SYS
MSG_SUBJECT_MANIFEST_SUM	Message Subject for Manifest Summary message	SYS
MSG_SUBJECT_MANIFE_DTL_A	Message Subject for Manifest Detail Amended message	SYS
MSG_SUBJECT_SELF_BIL_INV	Message Subject for Self bill Credit note	SYS
MSG_SUBJECT_TENDER_INVIT	Message Subject for Tender Invitation message	SYS
MSG_SUBJECT_TENDER_INV_A	Message Subject for Tender Invitation Amended message	SYS
MSG_SUBJECT_TENDER_SUM	Message Subject for Tender Invitation Summary message	SYS
MSG_SUBJECT_TEND_INV_DTL	Message Subject for Tender Invitation Detail message	SYS
MSG_SUBJECT_TND_INV_DT_A	Message Subject for Tender Invitation Detail Amended message	SYS
MSG_SUBJECT_TRIP_COM_LST	Message Subject for Trip Completed List	SYS
MSG_SUB_DEPOT	Identifies the depot to replace with the current depot of the order items in the emails to invite tenders.	SYS
MSG_TRIP_CONTACT	Messaging Contact Details	CO
MTMIF_DEFAULT_CUR	Default value for DEFAULT_CUR in MTM LOCATION table.	SYS
MTMIF_DELV_SRV_CLASS_ID	Default value for DELV_SRV_CLASS_ID in MTM LOCATION table.	SYS
MTMIF_DEL_STOPTM	Default value for DEL_STOPTM in MTM LOCATION table.	SYS
MTMIF_ITEM_SOURCE	Defines what item information is uploaded to MTM into item_id column, PROD_TYPE, TEMP_COMBO or DU_TYPE	SYS
MTMIF_LOAD_CLASS_ID	Default value for LOAD_CLASS_ID in MTM	SYS



Parameter	Description	
	LOCATION table.	
MTMIF_LOAD_TYPE_SOURCE	Defines what Load information is uploaded to MTM into load_type_id column, PROD_TYPE, TEMP_COMBO or DU_TYPE	SYS
MTMIF_PICK_SRV_CLASS_ID	Default value for PICK_SRV_CLASS_ID in MTM LOCATION table.	SYS
MTMIF_PRODUCT_SOURCE	Defines what Product information is uploaded to MTM into product_id column, PROD_TYPE or NULL	SYS
MTMIF_PU_STOPTM	Default value for PU_STOPTM in MTM LOCATION table.	SYS
MTMIF_SEND_DUS	MTM Interface Send DUs - Y, N or RPE (Y sends DU Qty, RPE sends RPE Qty).	SYS
MTMIF_SEND_PIECES	MTM Interface Send Pieces - Y, N or RPE (Y sends DU Qty, RPE sends RPE Qty).	SYS
MTMIF_SEND_VOLUME	MTM Interface Send Volume - Y or N	SYS
MTMIF_SEND_WEIGHT	MTM Interface Send Weight - Y or N	SYS
MTMIF_SPLIT_CUBE	Default value for SPLIT_CUBE in MTM LOCATION table.	SYS
MTMIF_SPLIT_PALLET	Default value for SPLIT_PALLET in MTM LOCATION table.	SYS
MTMIF_SPLIT_PIECES	Default value for SPLIT_PIECES in MTM LOCATION table.	SYS
MTMIF_SPLIT_WEIGHT	Default value for SPLIT_WEIGHT in MTM LOCATION table.	SYS
MTMIF_XDOCK_HANDLING_TIME	Default value for XDOCK_HANDLING_TIME in MTM LOCATION table.	SYS
MTM_INSTALLED	MTM Installed ? - YES or NO	SYS
MTM_OPTIMISE_WAIT_TIME	Should wait time incurred at a stop be moved to end of the preceding stop if the latter is an RDC.	SYS
MTM_PATH	MTM Path	SYS
MTM_UPDATE_ORDERS	MTM Interface Update Orders - Y or N	SYS
MTM_VERSION	MTM Version	SYS
MTS_CSV_EXPORT_PATH	First path that exports looks for when writing a csv to the file system	SYS
MTS_CSV_EXPORT_PATH_ORIS	First path that exports looks for when writing a csv to the file system for ORIS	SYS
MTS_CSV_FTP_PATH	used by EXPORTS Form to set the Client Server FTP Path	SYS
MTS_CSV_IP_ADDR	CSV IP Address	SYS
MTS_CSV_LOCAL_PATH	used by EXPORTS Form in Client Server mode - sets where on users PC exports will be written to	SYS
MTS_CSV_PASSWORD	CSV Password	SYS
MTS_CSV_USER	CSV User	SYS
MTS_CSV_WEB_ADDR	CSV Web address	SYS
MTS_CSV_WEB_PATH	forms part of the URL when generating an export, different value depending on environment	SYS
MTS_CURRENT_VERSION	MTS Client Server current version	SYS
MTS_ENABLE_SECURITY	Is Security Enabled - Y or N	SYS
MTS_EXPORT_PATH	Second path that exports looks for when writing a csv to the file system	SYS
MTS_FILE_UPLOAD_URL	URL for launching the MTS File Upload	SYS
MTS_FTP_USER	Mts ftp user to be used within the stand-alone Upload/Import application.	SYS
MTS_FTP_USER_PWORD	Mts ftp user account password.	SYS
MTS_FTP_VBAPP_IMPORT_PATH	MTS Import Path for the VB ftp application	SYS
MTS_IMPORT_PATH	MTS Import Path	SYS
MTS_IMPORT_VIRTUAL_PATH	MTS Virtual Import Path	SYS



Parameter	Description	
MTS_INTERFACE	The standard file structure for interfacing	SYS
MTS_LATEST_REVISION	Latest MTS Version	SYS
MTS_LOCATION_USAGE	Controls how Locations are grouped, either via CUST_GROUP, CUSTOMER, used in Customer form to display correct tab	SYS
MTS_LOG_DIR	Path where MTS application error logs are written to	SYS
MTS_OUTBOUND_ORDER_PATH	File path for Outbound Orders .	SYS
MTS_PRODUCT_RELEASE	MTS Product RELEASE	SYS
MTS_PRODUCT_VERSION	MTS Product Version	SYS
MTS_TRACKING_SYSTEM_1	Stores the name of one of the tracking systems used in MTS	SYS
MTS_TRACKING_SYSTEM_2	Stores the name of one of the tracking systems used in MTS	SYS
MTS_TRACKING_SYSTEM_3	TomTom Tracking System	SYS
MTS_UNQ_DEPOT_DEPARTS	Do departure times need to be unique ? - Y or N	CO
MTS_WIDE_SCREEN	Should Execution screen be available in Wide Screen	SYS
NEW_ORDER_CONF	Controls if customers are emailed an order confirmation	CO
NORTHERN_MANIFEST	Depot Linked to Northern Manifests	SYS
NO_RECALC_VOL	Controls volume is calculated from the system	CO
NO_VALID_ORDS_ACPT	When Y -setting trip to Accepted will not call validate order	SYS
NULL_EXT_REF	Error if external ref is null on manual order	CO
OBS_BACKGROUND	Background Colour	SYS
OF_CURRENCY_CODE	Oracle Financial Currency Code	SYS
OF_FILE_ARCHIVE	Oracle financials archive file path.	SYS
OF_FILE_NAME_SECTION2	Stores the name of section 2 on the OF filename	SYS
OF_FILE_PATH	Oracle financials file path.	SYS
OF_FTP_DESTINATION_DIRECTORY	Oracle Financials FTP Dir	CO
OF_FTP_DESTINATION_DIRECTORY	Oracle Financials FTP Dir	SYS
OF_FTP_DESTINATION_IP_ADDRESS	Oracle Financials FTP IP	SYS
OF_FTP_DESTINATION_IP_ADDRESS	Oracle Financials FTP IP	CO
OF_FTP_DESTINATION_PASSWORD	Oracle Financials FTP Password	CO
OF_FTP_DESTINATION_PASSWORD	Oracle Financials FTP Password	SYS
OF_FTP_DESTINATION_PORT	Oracle Financials FTP Port	SYS
OF_FTP_DESTINATION_PORT	Oracle Financials FTP Port	CO
OF_FTP_DESTINATION_USERNAME	Oracle Financials FTP User	SYS
OF_FTP_DESTINATION_USERNAME	Oracle Financials FTP User	CO
OF_FTP_DEST_DTL_DIRECTORY	Cargowise Details directory	CO
OF_FTP_DEST_DTL_PASSWORD	Cargowise Details password	CO
OF_FTP_DEST_DTL_USERNAME	Cargowise Details username	CO
OF_IF_DTL	Oracle Financial IF DTL	SYS
OF_IF_FTR	Oracle Financial IF FTR	SYS
OF_IF_HDR	Oracle Financial IF HDR	SYS
OF_JRNL_ENTRY_SOURCE_NAME	Oracle Financial Journal Entry Source Name	SYS
OF_ORIGID	Stores the name of ORIGID	SYS
OF_SECTION2	Stores the name of section 2 on the OF filename	SYS
OF_SETTINGS	Controls if Oracle Financial settings are required for 11i and R12	SYS
OF_SOURCE_SYSTEM_CODE	Oracle Financial System Code	SYS
OMS_ACTUALS_MANDATORY	Governs which ACTUAL_QUANTITY fields require mandatory population in Debrief forms.	SYS
OMS_ADD_ORDER_TO_LOCS	Should orders added to a Trip be added to existing stops based on Location Id - YES or NO	SYS
OMS_ADD_ORDER_TO_MILK	Allow orders to be added to Milk round Routes	CO



Parameter	Description	
OMS_ADD_PACKED_LINE	Allow an order to be valid when it contains an order line with a planned qty of zero? (Y/N)	COS
OMS_ALLOW_DUPL_CUST_REF	This parameter when set will allow the duplicate customer references	SYS
OMS_ALLOW_MANUAL_SCHEDULE	Display Manual Schedule Flag in orders screen	COS
OMS_ALTERNATE_REBOOK	Alternative Rebook Functionality	COS
OMS_AMEND_SVC_FLAGS	OMS_AMEND_SVC_FLAGS	SYS
OMS_AVG_WEIGHT	Uses average weight to calculate the weight against an order	COS
OMS_CHANGE_DEL_TYPE	List of Delivery types allowing change	SYS
OMS_CHECK_CUTOFF	Controls if cut of times for product and du are considered when creating orders	SYS
OMS_CONSOLIDATE_DUPLICATE_LINES	Enables the consolidation of duplicate order lines during order entry (Y/N).	COS
OMS_CONSOL_ITEMS	Controls if items are consolidated in order xml	COS
OMS_CONTACT_TRACKING	To control the use of the order and location contacts for the contacts when they are sent to EPOD and Portal TTM.	SYS
OMS_CREATE_DUMMY_SOL	Create dummy SOL records for Dunelm	SYS
OMS_CREATE_POD	Create CSV POD files for the customer? (Y/N)	CUS
OMS_CUTOFF_TIME_DEFAULT	Sets the default cut-off time in format HH24:MI for the order time window calculation should a schedule rule not exist for the locations.	SYS
OMS_DEFAULT_ORDER_CREATION	Controls dates needed when creating Orders in Orders form. ALL, COLLECTION, DELIVERY or STANDARD	SYS
OMS_DEFAULT_SERVICE_LEVEL	Default service level for the derivation of the time windows for parcel orders.	COS
OMS_DEFAULT_TEMPLATE_METHOD	Default method for generating orders from order template screen (M for Multiple, S for Single)	SYS
OMS_DEF_PROD_TYPE	Default Prod Type for Dunelm	SYS
OMS_EXCLUDE_AUDIT	Exclude changes to field from audit	SYS
OMS_FOOTPRINT_FOR_VOLUME	Will the footprint of the order line be include in the VOLUME item for the outbound XML file for the despatch units instead of the cubic volume (Y/N)?	COS
OMS_INCLUDE_X_ITEM_PREFIX	Allow items with a prefix of X to be included in the Load Management screen and Microlise files (Y/N)?	COS
OMS_INVALID_SAME_LOCS	Set the order status to INVALID when the from and to locations are the same (Y/N)	SYS
OMS_ITEMS	Generate Item Identifier using OMS reference and count of items	COS
OMS_ITEM_AKA_DISPLAY	Controls the label on the AKA Code field	COS
OMS_LEAVE_AS_NEW	To indicate if orders currently at status NEW are to be left at that status after validation other than the paragon interface? (Y/N)	SYS
OMS_MIC_DEL_DATE	Are MIC files generated when delivery windows are updated	SYS
OMS_NO_LIFTS	Controls if lifts are included in order xml	COS
OMS_NO_TRIP_REF_TRG	Do not obtain trip information in order triggers	SYS
OMS_OFFERED_EARLY_OFFSET	The number of hours (minus) to offset the early collection or delivery time for the order when its booking status is OFFERED.	COS
OMS_OFFERED_LATE_OFFSET	The number of hours (plus) to offset the late collection or delivery time for the order when its booking status is OFFERED.	COS
OMS_ORDER_ARCH_DEL_DAYS	Number of days that archived Order Audit messages will be retained for.	SYS
OMS_ORDER_AUDIT_ARCH_DAYS		SYS



Parameter	Description	
	Number of days that Order Audit message should be retained in the main table before being archived.	
OMS_ORDER_ID	Use the OMS Ref for the Order ID	CO3
OMS_RECALC_OH_RPE	Recalculate the planned and packed RPE when an order is validated (Y/N).	CO3
OMS_RESET_AUTO_PROC	Will the auto-processed flags of the order for the scheduling engine be reset when the early delivery date and time is changed? (Y/N)	CO3
OMS_RE_BOOK_STATUS	Controls the status of re-book orders to DEL_FUTILE	SYS
OMS_SEQ_CTL_ITEM_FORMAT	Add a prefix for the OMS reference for the order items as well as a sequential number (Y/N)	SYS
OMS_SESSION_EARLY	Earliest arrival offset before the end of the handling time	SYS
OMS_SESSION_HANDLING	Handling time associated with session collections	SYS
OMS_SESSION_LATE	Latest arrival offset after the end of the handling time	SYS
OMS_SESSION_WINDOW	Percentage value used to calculate the collection date and time window for transport orders generated from sessions	SYS
OMS_SET_DATES	Change Delivery dates on Invalid Back orders	CO3
OMS_SET_DELIVERY_TYPE	Order on/off/not in Schedule	CO3
OMS_STD_ITEMS	Controls if Standard items are auto generated	CO3
OMS_STD_RULE	Schedule rules applied excluding transport mode and delivery types	SYS
OMS_TAG_TO_ASSET_TYPE	Order types to be validated in TAG to Asset Scanning	SYS
OMS_TRACK_ITEMS	Indicates if the tracking references will be stored as order items. (Y/N)	CUS
OMS_TRACK_ITEMS	Indicates if the tracking references will be stored as order items. (Y/N)	CO3
OMS_UNIQUE_EXT_REF	Controls if imports can load multiple order lines	CUS
OMS_UPDATE_SCHEDULE_TO_TRIP	Update the time windows for the orders that exist on a trip when the schedule of the trip is changed in the Planning screen.	SYS
OMS_VALIDATE_INACTIVE_CODES	To validate orders with error condition for an invalid code for delivery type and service level	SYS
OMS_VALIDATE_TEMPLATE	Controls whether the Template Id is populated with the associated Lane Id - LANE or NULL	SYS
OPEN_FTP_DESTINATION_DIRECTORY	OPEN FTP destination Directory	SYS
OPEN_FTP_DESTINATION_IP_ADDRESS	OPEN FTP destination IP Address	SYS
OPEN_FTP_DESTINATION_IP_ADDRESS_COPY	OPEN FTP destination IP Address	SYS
OPEN_FTP_DESTINATION_PASSWORD	OPEN FTP Password	SYS
OPEN_FTP_DESTINATION_PORT	OPEN FTP destination Port	SYS
OPEN_FTP_DESTINATION_USERNAME	OPEN FTP Username	SYS
OP_SYS	Operating system	SYS
OP_SYS_VER	Operating system version	SYS
OR3_INTERFACE	Is the PR3 interface active	SYS
ORDER_SEARCH_CONSOL	Include orders that have passed through a user's SCHED GROUP	SYS
ORDER_WELL_HIGHLIGHT	Highlight Orders where matching trip found	CO3
ORD_ALLOW_SHIPMENTS	Consolidate Orders on Shipments	CO3
ORD_BOOKING_METHOD	CSV Import - Booking Method -HOME for home delivery, any other value for standard	CO3
ORD_BOOKING_STATUS	Controls if Booking status is displayed	CO3
ORD_CHANGE_BOOKING	Controls if a change to the booking ref is reflected on the payment	CO3
ORD_CHECK_DUPLICATE_ORDERS	For orders where source system is IMPORTS check to see if order is a duplicate - Y or N	SYS



Parameter	Description	
ORD_CLEAR_DATES	Are dates cleared in the interface	SYS
ORD_CONF_REPORT	Ord Conf report	COS
ORD_COPY_ALL_REFS	Are all references copied when items are split?	SYS
ORD_CREATE_MANIFEST	Controls if a portal manifest record is created for Manual Orders	COS
ORD_CREATE_PORTAL_ITEM_IDS	Does C-TMS generate the item identifiers for Portal orders	SYS
ORD_CREATTE_PORTAL_ITEM_IDS	Does C-TMS generate the item identifiers for Portal orders	SYS
ORD_DEBRIEF_DAYS	Default number of days used to restrict Orders displayed by Order Debrief form.	SYS
ORD_DEFAULT_AIR	Default Dimensional Weight Factor for Air Transport	SYS
ORD_DEFAULT_CC	Order Default Cost Centre	SYS
ORD_DEFAULT_CUST	Order Default Customer	SYS
ORD_DEFAULT_DEL_TYPE	Order Default Delivery Type	SYS
ORD_DEFAULT_ROAD	Default Dimensional Weight Factor for Road Transport	SYS
ORD_DEFAULT_SEND_TO_MTM	Order Default Send to MTM Flag	SYS
ORD_DEFAULT_SESSION_DU_TYPE	Standard delivery unit used to transport unprocessed blood from sessions	SYS
ORD_DEFAULT_SESSION_PROD_TYPE	Standard product type used to transport unprocessed blood from sessions	SYS
ORD_DEFAULT_TRANSCODE	Order Default Trans. Code	SYS
ORD_DESP2_RESEND	Allow Desp2 message to be resent from orders screen	COS
ORD_DISPLAY_LIFTS	Display Lifts in preference to quantity	SYS
ORD_EARLY_COLLECT_THRESHOLD	Number of Hours Early Collection Time can be before the Current Date/Time when creating an Order	SYS
ORD_EDIT_RPE	Enable the RPE of an order line to be edited? (Y/N)	COS
ORD_EFFECTIVE_FUEL	Indicates if Fuel charges are fixed or based on effective dates	COS
ORD_END_TIME	The default late delivery time when a route is not provided for an API order (HH:MM)	SYS
ORD_ENHANCED_REBOOK	Controls which rebook screen is displayed in the orders form	COS
ORD_EQUIPMENT_LOAD	Controls if equipment & equipment times are validated	SYS
ORD_FIXED_SCHEDULE_CHECK	Check for existing fixed schedule generated orders	CUS
ORD_FUTURE_LIMIT_DAYS	Maximum Number of days in the future that an order can be created	SYS
ORD_FUTURE_OFFSET	How far in the future can order offset be set	COS
ORD_IGNORE_LINE	Are some order lines ignored in the interface	SYS
ORD_JUST_IN_TIME	Is the collection window set just in time	CUS
ORD_LATE_TIME	Late time windows for generated stack orders	SYS
ORD_LINE_LENGTH	Store LENGTH i/o FOOTPRINT	COS
ORD_LINE_METHOD	Line Qty Calc Method	COS
ORD_LINK_CONTENTS	Link Items and contents in the interface	SYS
ORD_NO_DEL_FOR_FAILS	Controls if DEL messages are generated for FAILED orders - Y to prevent, C to send as CAN	COS
ORD_OMIT_PACK_SCHEDULING	Omit the scheduling of the order and only print the label when pack confirming.	COS
ORD_ON_SCHED_DEL_LOC	Du category to be assessed for exclusion from parcel scheduling	CUS
ORD_POSTCODE_SEARCH	Determines whether the user can search for order addresses via a postcode (Y/N).	SYS
ORD_PROCESSED_MSG	Ord Conf Processed Email Msg	COS
ORD_PROCESSED_SUBJECT	Ord Conf Processed Subject	COS



Parameter	Description	
ORD_QUANTITY_DU_FIELDS_FORMAT_MASK	Default quantity and pallet fields format mask	SYS
ORD_QUANTITY_PALLET_FIELDS_FORMAT_MASK	Default quantity and pallet fields format mask	SYS
ORD_RBO_PREFIX	Is the rebook prefix stripped for LOTS?	SYS
ORD_REASON_CODE_FILTER	Order Reason Code Filter	SYS
ORD_REASON_SUP	Reason codes to be suppressed in the web service	CO
ORD_RECEIVED_MSG	Ord Conf Received Email Msg	CO
ORD_RECEIVED_SUBJECT	Ord Conf Received Subject	CO
ORD_REMOVE_CANC	Controls if Orders Cancelled in C-TMS generate REM message to LOTS	CO
ORD_REPRINT_PACK_VISIBLE	Determines whether the Reprint Labels and Pack Confirm buttons are visible. (Y/N).	SYS
ORD_RETAIN_PLANNED	Planned weight is retained on lines	CO
ORD_RPE_LM_FACTOR	The factor for loading meters to calculate the RPE of the orders.	CO
ORD_SET_BUSINESS_TYPE	Set Business Type on Orders	CO
ORD_SET_SERVICE	Controls if the service level is set to match the delivery type	SYS
ORD_SPLIT_ALL_REFS	Are all references copied when items are split?	SYS
ORD_SPLIT_REBOOK_ITEMS	Controls if items on the original order suffixed with X when the order is re-booked	CO
ORD_SPLI_ALL_REFS	Are all references copied when items are split?	SYS
ORD_STACK_DEBRIEF	Order Stack Debrief	CO
ORD_START_TIME	The default early delivery time when a route is not provided for an API order (HH:MM)	SYS
ORD_TARGET_SEND_TO_MTM	Order Target Send to MTM - Y or N	SYS
ORD_TEMPERATURE_COMBO	Use Temperature Combo to determine if the customer reference should be highlighted.	CO
ORD_TEMPLATE_EDIT_UPDATE	Controls whether the user can edit the order template data during generation (Y/N).	SYS
ORD_UNCHEDULE_FAILS	Controls if Orders Cancelled in EPOD generate a CANC message to LOTS	CO
ORD_UNSCHD_COMP	Controls if Orders with 0 qty delivered be unscheduled from COMPLETED trips?	CO
ORD_UPDATE_LATE_COLL_DATE_TO_DEL	Controls if the Late Collection Date/Time is updated at Save to Match the Late Delivery Date/Time.	SYS
ORD_VALIDATE_GROUP_NAME	Validate Group Name during order entry	CO
ORD_WRITE_NOTES	Write Order Notes.	SYS
ORD_XDOCK_LOTS_DEL_MSG	Lots DEL msg is only sent on last trip for xdock orders (Y/N)	SYS
ORS_DELIMITER	Oracle reporting suite data field delimiter	SYS
ORS_SUMMARY	Allow the summarisation OF ORS reports	SYS
ORS_TYPE_DEF_GROUP_BY	List of the ORS types to default group by fields	SYS
ORS_TYPE_EXC_GROUP	Exclude ORS types from grouping fields	SYS
OST_DEBRIEF_WARNING_DAYS	Number of days prior to current date for which orders not debriefed will included in warning message in Order Tracking form.	SYS
OUTBOUND_3	File path for Outbound Trips.	SYS
P2	users	SYS
PALLET_BASED_RATING	Rate based on chargeable/non chargeable pallets	CU
PARAGON_IMPORT_LAYOUT	Paragon Import Layout	CO
PARAGON_INSTALLED	Paragon Installed ? - YES or NO. Only one of MTM_INSTALLED or PARAGON_INSTALLED should be set to YES.	SYS
PARAGON_INSTALLED	Paragon Installed ? - YES or NO. Only one of MTM_INSTALLED or PARAGON_INSTALLED should be set to YES.	CO



Parameter	Description	
PARAGON_RUNNING	Paragon Import is currently running (to stop outbound XML jobs)	SYS
PARAGON_SCHED_DAYS	Determines how many days back paragon should extract records	CO3
PAR_ALLOW_IMPORT_UNDO	Used to indicate if the UNDO button is allowed to be pressed on the Paragon Trip Import? (Y/N)	CO3
PAR_API	Create Control records for Paragon API	SYS
PAR_AUDIT	Include auditing of the import process in the STP version of the Paragon API (Y/N)	SYS
PAR_AUTO_RESET_NEW	Auto reset orders at status New after paragon run	CO3
PAR_CHECKSUM_OFF	To indicate if the checksum validation code is required for paragon imports? (Y/N)	SYS
PAR_DISPLAY_IMPORT_DETAILS	Used to indicate whether the additional message containing the imported details is displayed or not on the Paragon Trip Import? (Y/N)	CO3
PAR_DUN_COL_END_OFFSET	Offset for Dunelm collection end time	SYS
PAR_DUN_COL_START_OFFSET	Offset for Dunelm collection start time	SYS
PAR_DUN_TRUNK_CUTOFF_TIME	Set a cut-off time in format HH24:MI to apply to trunk trips to use the current schedule for the day.	SYS
PAR_DUN_TRUNK_OFFSET_DAYS	Set a number of days to assess the trunk trips for the DUN radial trips.	SYS
PAR_ENDPOINT_URL	URL for paragon API	SYS
PAR_EXPORT_FORECAST	Send forecast values to Paragon	CO3
PAR_FREQUENCY	Frequency for PAR Master keys	SYS
PAR_FTP_DESTINATION_DIRECTORY	Directory for FTP of Paragon Files	SYS
PAR_FTP_DESTINATION_IP_ADDRESS	IP for FTP of Paragon Files	SYS
PAR_FTP_DESTINATION_IP_ADDRESS_OLD	IP for FTP of Paragon Files	SYS
PAR_FTP_DESTINATION_PASSWORD	Password for FTP of Paragon Files	SYS
PAR_FTP_DESTINATION_PORT	Port for FTP of Paragon Files	SYS
PAR_FTP_DESTINATION_USERNAME	Username for FTP of Paragon Files	SYS
PAR_GROUP_STAGING	Paragon Group Staging Level	SYS
PAR_INBOUND_ARCH	Path for Paragon XML archiving	SYS
PAR_INBOUND_FAIL	Path for Paragon XML failures	SYS
PAR_INBOUND_IDENTIFIER	Pattern for Paragon Trip Inbound XML	SYS
PAR_INBOUND_LISTING_NAME	Filename for list of files in directory for Paragon XML trip Inbound	SYS
PAR_INBOUND_PATH	Path for yet to be processed XML files from Paragon	SYS
PAR_INT_SCREEN_CLASSIC_LAYOUT	Removes/Renames fields in PAR_INT to traditional C-TMS system setup rather than those changed for industrial	SYS
PAR_KEY_FORMAT	PAR Master key format WKXX, DDMM, DAYX	SYS
PAR_KEY_PROJECT	PAR Project name	SYS
PAR_LISTING_SCRIPT_NAME	Script name for Paragon XML Trip Inbound	SYS
PAR_OUTBOUND_ARCH	Path for archiving outbound Paragon XML interfaces	SYS
PAR_OUTBOUND_FAIL	Path for failing outbound Paragon XML interfaces	SYS
PAR_OUTBOUND_PATH	Path for outbound Paragon XML interfaces	SYS
PAR_PLAN_DIRECT	Controls if Paragon will plan direct collections (Not to owning depot)	CO3
PAR_PROXY	Paragon Proxy Server	SYS
PAR_RUN_NUMBER	Is Paragon Planning based on Run Numbers?	SYS
PAR_SEND_ALL_LOCATIONS	Are locations sent out via API	SYS
PAR_SET_ALL_FROM_NEW	Should all orders and trips set as NEW be updated after Paragon Run	SYS
PAR_SHUNT_TRUNK	Check if the shunt and trunk routing has been completed prior to exporting to Paragon (Y/N).	SYS
PAR_SLOT_CUTOFF_TIME		SYS



Parameter	Description	
	Number of minutes before slot window start that it closes to new orders	
PAR_START_DATE	Start Date for Master Keys	SYS
PAR_TENNANT	Tenant for paragon API	SYS
PAR_TENNANT_KEY1	Tenant KEY 1 for paragon API	SYS
PAR_TENNANT_KEY2	Tenant KEY 2 for paragon API	SYS
PAR_TRIP_STATUS	Controls the status of any Trips that are created via the Paragon Interface.	SYS
PAR_TRUNK_THRESHOLD_UOM	Controls the order qty measure used as a threshold when assigning orders to Trunk trips in the Paragon Import. Values are WEIGHT, RPE or VOLUME.	COS
PAR_TRUNK_TRIP	Are trunk trips generated from Paragon Plan	SYS
PAR_USE_LOC	Paragon Use From location of order s depot	SYS
PAR_USE_RPOXY	Paragon Use Proxy	SYS
PAR_USE_SLOTS	Use slots when exporting to Paragon (DUN format)	SYS
PAR_VIRTUAL_OUT_ARCH	Path for webshow of archiving outbound Paragon XML interfaces	SYS
PAR_VIRTUAL_OUT_FAIL	Path for webshow of failing outbound Paragon XML interfaces	SYS
PAR_XML_OLD_ORDERS	Number of days in the past to still be included for sending orders to paragon	SYS
PERCENTAGE_MARGIN	Percentage Margin Value	SYS
PETAL_STARTS_AT_ANY_DEPOT	Does a Petal start at a Depot ?	SYS
PLANNING_AUTO_SCHED_INACTIVE_DEPOTS	List the inactive depots by commas and in single quotes to exclude their orders in the Planning screen.	SYS
PLAN_REG_COUNTRY	Planning Region Country suffix	COS
POLAR_CUST_REF	Controls the source of cust ref in Polar Speed labels	CUS
POM_DATE_END	Number of days after Purchase Order dates	SYS
POM_DATE_START	Number of days before Purchase Order dates	SYS
POM_DEF_COST	Default Cost Centre for PO	SYS
POM_DEF_CUST	Default Customer for PO	SYS
POM_DEF_PROD_TYPE	Default Product Type for PO	SYS
POM_INBOUND_ARCH	Path for processed XML files that have successfully completed processing, see: int_po_inbound_header	SYS
POM_INBOUND_FAIL	Path for processed XML files that have failed processing for reasons described against int_po_inbound_header	SYS
POM_INBOUND_PATH	Path for yet to be processed XML files	SYS
POM_OUTBOUND_ARCH	Path for processed POM outbound XML files that have successfully completed processing	SYS
POM_OUTBOUND_PATH	Path for PO outbound files	SYS
PORSCHE_DOT_CODE	Tyre Age for PORSCHE	SYS
PORTAL_AUTO_SCHED_RET_DAYS	Day range for auto allocation of return orders	SYS
PORTAL_DEF_DEL_TYPE	Delivery Type for Return orders	SYS
PORTAL_ORDERS	Portal Imports available	SYS
POSTAL_STRINGS_TOWN	Is town compared in postal string zones	SYS
POSTCODE_SHIPMENTS	Indicates if shipments are postcode based	COS
PO_OVERRIDE_DU_WITH_SUB	A comma-separated list of transit DU types for which the sub-transit DU type will be used instead to generate order lines for the PO	SYS
PRD_ITEM_IMPORT_FILE	Name of Product Item Import file	SYS
PRD_ITEM_IMPORT_PATH	Product Item Import path	SYS
PREVENT_ORD_COL_AFTER_DEL	Stop any ORD or COL messages after a DEL message	COS
PRINT_ACCEPTED_LABEL	Controls if customer labels are printed when trip is Accepted	COS



Parameter	Description	
PRINT_INBOUND_LABELS	Controls if labels are generated for inbound xml orders	SYS
PRINT_LABEL	Controls if customer labels may be reprinted from Order screen	CO
PRINT_LABEL_PATH	File path for Parcel Carrier Labels to be printed	SYS
PROJECT_LOCATIONS	Indicates which prefixes are used for project location ids	CO
PTV_RO_ARCH_DIR	Folder for archive of PTV RO files	SYS
PTV_RO_AUTO	PTV Automatic Response from Import	SYS
PTV_RO_DEL_PRIORITY_DAYS	Number of days before late delivery when prioritized in Route Optimiser	SYS
PTV_RO_DIR	Folder for PTV RO files	SYS
PTV_RO_EXTEND	PTV plan covers more than 1 week	SYS
PTV_RO_FILE_API	Create File or send data via API	SYS
PTV_RO_FIX_MINUS1	Reduce fix time by 1 when sending to PTV RO	SYS
PTV_RO_GROUP_NAME	Select PTV unscheduled orders by group name rather than depot	SYS
PTV_RO_MASTER_PROFILE	Profile for PTV RO webservice	SYS
PTV_RO_MASTER_PROFILE_DEPOT	Profile for PTV RO webservice	SYS
PTV_RO_ORDER_PAIRS	PTV Send load and unload tasks combined	SYS
PTV_RO_ORD_FUTURE_DAYS	PTV Orders Future Days	SYS
PTV_RO_ORD_HISTORIC_DAYS	PTV Orders Historic Days	SYS
PTV_RO_PASSWORD	Password for PTV RO webservice	SYS
PTV_RO_PASSWORD_BETA	Password for PTV RO webservice	SYS
PTV_RO_PROFILE	Profile for PTV RO webservice	SYS
PTV_RO_PROFILE_DEPOT_SCHED	Profile for PTV RO webservice	SYS
PTV_RO_PROJECT	Project for PTV RO webservice	SYS
PTV_RO_PROXY	Proxy server name for PTV RO webservice	SYS
PTV_RO_SEND_RETRO	Send retro orders	SYS
PTV_RO_SET_ROUTE	Set route code on trips from PTV RO	SYS
PTV_RO_SPLIT	PTV imported route returns to Start Depot	SYS
PTV_RO_TIMEOUT	Timeout for PTV RO webservice	SYS
PTV_RO_TRIPS_HISTORIC_DAYS	PTV Trips Historic Days	SYS
PTV_RO_TRIP_FUTURE_DAYS	PTV Trips Future Days	SYS
PTV_RO_URL	URL for PTV RO webservice	SYS
PTV_RO_URL_BETA	URL for PTV RO webservice	SYS
PTV_RO_URL_NHS	URL for PTV RO webservice	SYS
PTV_RO_USERNAME	Username for PTV RO webservice	SYS
PTV_RO_USERNAME_BETA	Username for PTV RO webservice	SYS
PTV_RO_USERNAME_NHS	Username for PTV RO webservice	SYS
PTV_RO_WAIT_TIMEOUT	Timeout for PTV RO webservice Response	SYS
RADIO_DU	Radio active	CO
RDT_441_CHECK_DAYS	Set a number of days in which to assess the prior loading messages for WCS.	SYS
REBOOK_ALT_STATUS	If set to Y when an order is rebooked the original orders status will not be changed	SYS
REBOOK_COPY_SUB_REF_CONTACTS	Set as Y or N to copy Sub References on Rebook, contact details only i.e. SMS and Email details	CO
RECORD_LIMIT	Limitation of records to display on Customer Service Screen	SYS
REFRESH_WHEN_CLOSE_ORDER_DETAILS	Refresh the order summary screen when you close the order details page in the Orders form	SYS
REPORT_CONNECT_STRING	Report auto production - connect string (user/pass@database).	SYS
REPORT_DIRECTORY	Report auto production - place report in directory.	SYS



Parameter	Description	
REPORT_FLOC	Report auto production - name of FLOC directory for reports.	SYS
REPORT_IP_ADDRESS	Report auto production - IP address server.	SYS
REPORT_PORT	Report auto production - Port	SYS
REPORT_SERVER	Report auto production - name of report server.	SYS
REP_DELIVERY_DOCS	Name of the Delivery report printed from trip tree	COS
REP_JAVA_PDF	Java Report Controller Script	SYS
REP_JAVA_PDF_DIR	Java Report Folder	SYS
REP_JAVA_PDF_SHOW	Java Report Webshow Folder	SYS
REP_LOADING	Name of the loading report printed from trip tree	COS
REP_ORARRP_DEST_FILEPATH	Reports Destination Filepath	SYS
REP_ORD_EXTRACT_DAYS	Number of days that the order extract can be run for	SYS
REP_PDF_DEST_FILEPATH	Reports PDF File Path	SYS
REP_PDF_FILE_LOC	Reports PDF file location	SYS
REP_PDF_WEB_DEST_NAME	Reports PDF destination	SYS
REP_PDF_WEB_SERVER_NAME	Reports PDF Web Server Name	SYS
REP_PDF_WEB_SERVER_URL	Reports PDF Web Server URL	SYS
REP_SERVER_WEB	Reports Server	SYS
REP_SHOW_CARRIER	Controls if Carrier id is included in the Unshed Orders report	SYS
REP_SO_REF_FORMAT	Set as 1 or 0 to reformat Order Reference, extract all characters up to the first '-' or '_'	COS
REP_WEB_SERVER_NAME	Reports Web Server name	SYS
REP_WEB_SERVER_URL	Reports Server URL	SYS
RESEND_EFX_STATUS	Can users resend EFX at status Accepted and En-route	COS
RESOURCE_DIARY	Resource Diary for display of trip allocation	SYS
RES_ALTERNATIVE_CARRIER	During MTM sync, if Carrier does not exist should MTS check for alternative carrier ? - Y or N	SYS
RES_ALT_CARRIER	Controls access to Alternate carriers button on Resource form, these are used in TRIPSUM_JRL. - Y or N	SYS
RES_AVAILABILITY_ALLOC	Determines how resources are allocated to a trip	COS
RES_CONTROL_ALLOC_RESOURCE	Controls whether a resource can be assigned to more than one Carrier / Carrier Group	SYS
RES_DT_FUEL_UNITS	Current fuel unit - Litres or Gallons	SYS
RES_EXTERNAL_DRIVER	Use External Drivers	SYS
RES_TRACKING_SYSTEM_DISPLAYED	Null, Tractor, Trailer or Both to indicate if Tracking systems are enabled.	SYS
RETAIN_INTERFACE_ERRORS	Number of days Interface Errors are retained	COS
RE_PLAN_ORDERS	Controls if the Planner splits order for planning	SYS
RE_SEQUENCE_STOPS	Are trip stops validate	COS
RHA_INDEXES	Use RHA indexes	SYS
RICO_ACCOUNT	Rico Account login to Star-Gate	SYS
RICO_OUT_ARCH	Outbound archive folder for Rico XML files	SYS
RICO_OUT_DIR	Outbound folder for Rico XML files	SYS
RTE_CHECK_MISSING_STOPS	Determines which stops must be present on a Trip, either HIGHEST_OPTIONAL or ALL.	SYS
RTE_DEF_CAPACITY_MEASURE	Fixed Routes, default capacity measure (RPE, WEIGHT or VOLUME)	SYS
RTE_DISBAND_SEMI_HOURS	Sets the number of hours prior to departure when a SEMI_FIXED Trip should be disbanded	SYS
RTE_LOG_DEL_DAYS	Number of days that Fixed Routes log messages should be kept for	SYS
RTE_MAINT_RDC_ALL_USAGE	Allow the values for the fixed route locations to include an RDC location when the depot has not been	SYS



Parameter	Description	
	assigned to a customer or a customer group (Y/N)	
RTE_ORDERS_ASC_OR_DESC	Should orders be orders in Ascending or Descending order (ASC or DESC)	SYS
RTE_PLAN_BY_REGION	Allow Fixed Routes to plan by Postal Region or Planning Region, values are PL and PO.	SYS
RTE_PRIORITISE_URG_LATE_ORDS	Controls whether urgent and late orders are to prioritised in the Fixed Route process.	SYS
RTE_REGION_AND_ZONE	Will fixed routes crossdock by planning region and location zone? (Y/N)	SYS
RTE_SCHED_OFFSET_HRS	Fixed Routes Schedule Offset in hours	SYS
RTE_SEMI_FIXED_CAPACITY	Determines whether capacity is checked by FILL or TRAILER capacity.	SYS
RTE_SEMI_FIXED_FUNCTION	Should trips go to SEMI_FIXED if they are not optimum, Y or N.	SYS
RTE_STOPOVER_MINS	Default number of minutes for a stopover for the network route.	COS
RTE_TRIPS_DEL_DAYS	Fixed Route RTE Trips in status DELETED on schedules older than this value will be deleted	SYS
RTE_TRIPS_FIN_STATUS	Fixed Routes final status	SYS
RTE_TRIPS_TO_ACCEPTED	Defines if ACCEPTED or PLANNED Trips are deleted in Rev TI, if yes then ACCEPTED, otherwise PLANNED - Y or N	SYS
RTE_USE_CROSSDOCK	Should Fixed Routes allow crossdocks to be used.	SYS
SALES_EXPORT	Payments are to be exported	SYS
SAP_DEFAULT_DU_QTY	Default DU Quantity for bookings received via the SAP Interface.	SYS
SAP_DEFAULT_DU_TYPE	Default DU Type for bookings received via the SAP Interface.	SYS
SAP_DEFAULT_PROD_TYPE	Default Product Type for bookings received via the SAP Interface.	SYS
SAP_POD_MSG_RQD	Is SAP (POD) Messages Required to be Extracted out of MTS - Y or N.	SYS
SCHEDULE_RULES_SERVICE	Is service level displayed in schedule rules	COS
SCHED_ENG_DEL_OFFSET	The number of days that the order will remain in the delivery depot before it can be assigned to its delivery trip	COS
SCHED_ENG_DEL_OFFSET_CUTOFF	The cut off time at the delivery depot before an order can be assigned to its delivery trip	COS
SCHED_ENG_EXC_DU_CATEGORY	Du category to be EXCLUDED from parcel scheduling	CUS
SCHED_ENG_PART_PLAN	Will the network scheduling engine allow orders to be partially planned?(Y/N)	COS
SCHED_EXC_SI	Exclude order with special instructions from engine	COS
SCHED_RULE_SHOW_ZONE	Display zones instead of master location on delivery schedules in Sched Rules form	SYS
SCH_CSCS_EST_IMPORT_FILE	Name of CSCS Estimate Import file	SYS
SCH_CSCS_FC_IMPORT_FILE	Name of CSCS Forecast Import file	SYS
SCH_CSCS_IMPORT_PATH	CSCS Import path	SYS
SCH_DEFAULT_FIXED_TEMPLATE	Default Fixed Template Name for Auto Generation	SYS
SCH_DELETE_PROD_QUANT_DURATION	Number of days worth of Product Quantity data that gets deleted.	SYS
SCH_MANUAL_CREATE_SCHED	Ability to manually create schedules - Y or N	SYS
SCH_NAME_FORMAT	Schedule Name Format	SYS
SCH_RECORD_ITEM_DU_USE	Determine whether to update avg used flag and DU data on product quantity. This might be switched off to improve performance - Y or N	SYS
SCH_SCHEDULE_ADV_DAYS	Determines how many days in advance to generate fixed routes Schedule	SYS



Parameter	Description	
SCH_SCHED_DATE_RANGE	Range in days for displaying schedules	SYS
SCH_SCHED_DURATION	Schedule Duration (Days)	SYS
SCH_SCHED_ORD_DERIVE	Controls the Order Schedule Date. Acceptable values ECDT, LCDT, EDDT, LDDT.	SYS
SCH_SCHED_ORD_IMP_IGGESUND_SCHED_DATE_OVERRIDE	When Importing IGGESUND data, can the sched_date be over-written by the SCH_SCHED_ORD_DERIVE rule?	SYS
SCH_SCHED_ORD_IMP_TI_ORDER_SCHED_DATE_OVERRIDE	When Importing TI_ORDER data, can the sched_date be over-written by the SCH_SCHED_ORD_DERIVE rule?	SYS
SCH_SCHED_START	Schedule Start time	SYS
SCH_TRIP_ID_DEPOT	Controls if Trip ID is derived from Owning Depot	SYS
SCH_TRIP_ID_FMT	SCH Trip Id FMT	SYS
SCH_TRIP_ID_PREFIX	Prefix for Depot based Trip ID	SYS
SCH_VLS_IMPORT_FILE	Name of VLS Import File	SYS
SCH_VLS_IMPORT_PATH	VLS Import Path	SYS
SCR_CURRENT_HIGHLIGHT_COLOUR	Controls colour of highlighted rows in tables	SYS
SCR_HEADER_BKG_COLOUR	Colour for header toolbars on forms	SYS
SCR_HEADER_BMP_PATH	Location of BMP to control the colour of the toolbar/header in forms. Leave a trailing slash.	SYS
SCR_HEADER_TEXT_COLOUR	Colour of text in header toolbars on forms	SYS
SEC_GROUP_OR_BASEDAT	Security - Lock Monitor, display Group or Based at	SYS
SEND_CAN_WITHOUT_BOOKING	Allow CAN message to be sent without Booking Ref	SYS
SEND_INTERFACE_FAIL_EMAIL	Send email for interface errors	COS
SEND_LINE_ITEM_TO_LOTS	Send Line Item To LOTS. Y - send both Order Line (D) and Item (S) records. N - Checks for Items and, if there are any, sends Item (S) records, else Order Line (D) records.	SYS
SEND_MANF_TO_SUPP	Indicates if the supplier manifest report will be automatically generated when a trip is accepted for the cost centre of the trip being collected.	COS
SEND_MANF_TO_SUPP	Indicates if the supplier manifest report will be automatically generated when a trip is accepted for the cost centre of the trip being collected.	CUS
SEND_MIL_MESSAGES	Send Tracking Milestone Messages	CUS
SEND_PALLET_ID_XML	Send Pallet ID tag in xml	COS
SEND_SCP_MESSAGES	Send Supplier Collection Messages	CUS
SEND_SMS_EMAIL	Controls whether a SMS or an e-mail may be sent to the recipient of the order being delivered on the trip (Y/N).	COS
SEND_SMS_EMAIL_OLD	Controls whether a SMS or an e-mail may be sent to the recipient of the order being delivered on the trip (Y/N).	COS
SEND_TO_ISOTRAK	Send to ISOTRAK - ALL or NONE.	SYS
SERVICES	Controls if service payments are generated	COS
SESSION_DEFAULT_LOAD_RATE	Session Default Load rate	COS
SESSION_DEFAULT_UNLOAD_RATE	Session Default Unload rate	COS
SET_FAST_ORD_WINDOWS	Call fast order windows in Import	SYS
SET_MICROLISE_SLOTS	Determines if the delivery slot times are sent to Microlise instead of the planned delivery times.	SYS
SET_TRUNKS_ACCEPTED	Are Trunk trips automatically set to ACCEPTED status?	SYS
SFTP_LOG_LEVEL	SFTP Log level - numeric 0-3	SYS
SHA_EXCLUDE_AUDIT	Activity types that will be excluded from writing audit log records when they are activated.	SYS
SHIFT_ADDITIONAL_HOURS	Threshold for charging additional shift hours	COS
SHIFT_DISTANCE	Shift Distance	COS



Parameter	Description	
SHIPMENT_NO_QTY_RATING	Indicates if a shipment can be rated without quantities	CO3
SHIPMENT_VOLUME	Maximum shipment volume	SYS
SHIPMENT_WEIGHT	Maximum shipment weight	SYS
SHOW_CAPPED_TONNAGE	Display Capped Tonnage Details	SYS
SHOW_CARRIER_NAME	Is carrier name shown on Planning screen?	SYS
SHOW_CONTACT	Show contact name and number on labels.	CO3
SHOW_FULL_ADDRESS	Show full delivery address on labels.	CO3
SHOW_SCANNED_ITEMS_BTN	Display Scanned Items Update Button	SYS
SLOT_DFLT_TRAILER_TYPE	Default Trailer Type for Slots	SYS
SLOT_EXP_DIR	Slot Export - FTP to directory	SYS
SLOT_EXP_IP	Slot Export - FTP to IP address	SYS
SLOT_EXP_LOGIN	Slot Export - FTP using login	SYS
SLOT_EXP_PORT	Slot Export - FTP to Port	SYS
SLOT_INC_ADD_CORE_TYPES	Set to Y if Slot are to be defined as type CORE or ADDITIONAL	SYS
SMA_ALLOW_CREATE_ORDERS	Allow orders to be created	SYS
SMA_FTP_DESTINATION_DIRECTORY	Directory for FTP of Smartphone Files	SYS
SMA_FTP_DESTINATION_IP_ADDRESS	IP for FTP of Smartphone Files	SYS
SMA_FTP_DESTINATION_PASSWORD	Password for FTP of Smartphone Files	SYS
SMA_FTP_DESTINATION_PORT	Port for FTP of Smartphone Files	SYS
SMA_FTP_DESTINATION_USERNAME	Username for FTP of Smartphone Files	SYS
SMA_INBOUND_ARCH	Path for Smartphone XML archiving	SYS
SMA_INBOUND_FAIL	Path for Smartphone XML failure	SYS
SMA_INBOUND_IDENTIFIER	Pattern for SMA Trip inbound XML	SYS
SMA_INBOUND_LISTING_NAME	Filename for list of files in directory for SMA XML trip inbound	SYS
SMA_INBOUND_PATH	Path for yet to be processed XML files from Smartphone	SYS
SMA_LISTING_SCRIPT_NAME	Script name for SMA XML Trip inbound	SYS
SMA_OUTBOUND_ARCH	Path for archiving outbound Smartphone XML interface	SYS
SMA_OUTBOUND_FAIL	Path for failing outbound Smartphone XML interface	SYS
SMA_OUTBOUND_PATH	Path for outbound Smartphone XML interface	SYS
SMA_OWNING_DEPOT	Indicates if the Smartphone file is sent with Database or owing depot in the name	SYS
SMA_RESOURCE_UPDATE	Update resources on receipt of Smartphone message	CO3
SMA_SEND_ACCEPTED	Send ACCEPTED message to SMARTPHONE	SYS
SMA_SET_TO_COMP_CONF	Update Trip Status once Smartphone has provided all quantities and times	SYS
SMA_TO_DELIVER_IS_DELIVERED	Auto-Default the TO_DELIVER quantity from the DELIVERED quantity	CO3
SMS_AUDITING	Will records be audited in ADM_LOG for the SMS_EMAIL messages (Y/N)?	SYS
SMS_COL_DEL_BOTH	Send SMS for delivery/collection orders or both? (COL, DEL, BOTH)	CO3
SMS_GATEWAY_PWD	SMS Gateway Password	SYS
SMS_GATEWAY_URL	SMS Gateway URL	SYS
SMS_GATEWAY_USER	SMS Gateway Username	SYS
SMS_LANDLINE_EXCLUSION	Will SMS be excluded for landlines? (Y/N)	SYS
SMS_LOC_TYPES	Limit SMS and EMAIL Notifications to this list of location types only. If blank messages are sent for all stops	CO3
SMS_MULTI_MSG	Send multiple SMS message for each trip stop (Y/N)	CO3
SMS_SENDER_NUM	SMS Sender number to stop replies	SYS
SMS_SERVICE_BOX	Stores the e-mail address of the SMS service box.	SYS



Parameter	Description	
SMS_SERVICE_BOX_OLD	Stores the e-mail address of the SMS service box.	SYS
SMTP_ORDER_SENDER	Order Email Sender address	SCH
SMTP_ORD_CONF_SENDER	Ord Conf Email Sender Address	CO
SMTP_ORD_CONF_SENDERXX	Ord Conf Email Sender Address	CO
SMTP_PASSWORD	SMTP password	SYS
SMTP_PORT_NUMBER	SMTP Port Number	SYS
SMTP_PRIMARY	Primary Mail Server	SYS
SMTP_SECONDARY	Secondary Mail Server	SYS
SMTP_SENDER	Email Sender address	SYS
SMTP_SMS_PRIMARY	Primary mail server for SMS.	SYS
SMTP_SMS_SECONDARY	Secondary mail server for SMS.	SYS
SMTP_SMS_SENDER	Sender address for SMS.	SYS
SMTP_TRIP_SENDER	Trip Email Sender address	CO
SMTP_USER	SMTP Username	SYS
SOUTHERN_MANIFEST	Depot Linked to Southern Manifests	SYS
STOP_PID	LOTS - is STOP_PID included in the extract	SYS
SUBMIT_CARGOWISE_HEADER	Enter the number of minutes from FTP support files complete status to send header file?	SYS
SUGGEST_TRIP	Suggest an appropriate trip for an order	CO
SUPPLIER_MANF	Indicates the name of the supplier manifest report to be automatically generated when a trip is accepted.	CO
SVC_USE_SERVICE_TYPES	Controls whether Service types are to be used which includes the use of transaction, manual, late and urgent order charging.	SYS
T2A_ASSET_ARRIVED_OFFSET_DAYS	A number of offset days from the current date to select orders that have arrived at the depot for T2A Forward Items.	SYS
T2A_ASSET_DUE_OFFSET_DAYS	A number of offset days from the current date to select orders that are due arrive at the depot for T2A Forward Items.	SYS
TAG_TO_ASSET_SCANNING	Allow scanning and recording of Tags	SYS
TA_EMAIL_SUBJECT	Email subject for automatically e-mailing manifest	CO
TA_EMAIL_SUBJECT	Trip accept. Email subject.	SYS
TA_EMAIL_TEXT	Trip accept. Email message	SYS
TA_EMAIL_TEXT	Email text for automatically e-mailing manifest	CO
TA_FILE_NAME	Trip accept. Name of output file.	SYS
TA_FTP_DIRECTORY	Trip accept. FTP report to upload directory.	SYS
TA_FTP_IP_ADDRESS	Trip accept. FTP report to IP address.	SYS
TA_FTP_PASS	Trip accept. FTP report using password.	SYS
TA_FTP_PORT	Trip accept. FTP port.	SYS
TA_FTP_USER	Trip accept. FTP report using username.	SYS
TA_PDF_TO_TIFF1	Trip accept. Convert pdf to tiff.	SYS
TA_PDF_TO_TIFF2	Trip accept. Convert pdf to tiff.	SYS
TA_PDF_TO_TIFF3	Trip accept. Convert pdf to tiff stage 3.	CO
TA_PDF_TO_TIFF3	Trip accept. Convert pdf to tiff. Rotation for landscape	SYS
TA_REPORT_NAME	Trip accept. Name of report to be run. Please include the .rep extension.	CO
TA_REPORT_NAME	Trip accept. Name of report to be run. Please include the .rep extension.	SYS
TA_SUB_FROM	Trip accept. Sub file from	CO
TA_SUB_FROM	Indicates Zetafax value in .sub file in FROM:	CO
TA_SUB_FROM	Trip accept. Sub file from	SYS
TA_SUB_ORGANISATION	Trip accept. Sub file organisation	SYS
TA_SUB_PRIORITY	Trip accept. Sub file priority	SYS
TA_SUB_USER	Trip accept. Sub file user	CO



Parameter	Description	
TA_SUB_USER	Trip accept. Sub file user	SYS
TA_SUB_USER	Indicates Zetafax value in .sub file in USER:	COS
TDL_GEN_ITEMS	Allow order items to be generated from lines	SYS
TDL_INBOUND_ARCH	Path for TDL XML archiving	SYS
TDL_INBOUND_IDENTIFIER	Pattern for TDL Inbound XML	SYS
TDL_INBOUND_PATH	Path for yet to be processed XML files from TDL	SYS
TDL_ITEM_IN_PORTAL_FORMAT	Generate item identifier in portal format in order entry	SYS
TEND_EMAIL	Different format for Tender invitation	SYS
TEST	Controls whether certain testing functions are enabled - Y or N	SYS
TIMES_LOADING_TIME	Default Loading Time used in Slots import when recalculating times	SYS
TIME_ZONE_ACTIVE	Time Zone Active	SYS
TMS_AUTO_DEFAULT_RESOURCE	Automatically default the Resource - Smartphone	COS
TMS_OTBOUND_SO_REF	Controls the outbound format for SO_REF in LOTSC	CUS
TOK_CNAME	Defines the Tokairo Customer Name.	CUS
TOK_CUSTOMERS	A comma-delimited list of customers to interface with Tokairo.	SYS
TOK_FIELD	Defines the Tokairo field name.	CUS
TOK_OUTBOUND_ARCHIVE	Filepath for Tokairo Daily Extract archive	SYS
TOK_OUTBOUND_PATH	Filepath for Tokairo Daily Extract	SYS
TOK_POD_AVAIL	Is Tokairo being used to view POD documents - Y or N.	SYS
TOK_SRCH_PAGE	Defines the Tokairo search page.	SYS
TOK_URL_PREFIX	Defines the Tokairo URL prefix.	SYS
TOK_VIRDIR	Defines the Tokairo virtual directory.	CUS
TOMTOM_CHECK_DEPOT	Check the depot to control data sent to depot	SYS
TOMTOM_DRIP_FEED	Are stops sent to Webfleet by drip feed process	SYS
TOMTOM_ORDER_TYPES	Are WEBFLEET order types derived	SYS
TOMTOM_TIMES_ONLY	Do actual times on SU and CL set trip status	SYS
TRANSPORT_MODE	Are Customer Transport Mode Factors Required	COS
TRIP_ALWAYS_SHOW_EMERGENCY_ORDERS	Emergency Deliveries are always displayed regardless of filter criterion	SYS
TRIP_BRIEF_MAINTENANCE	Enable the Trailer Type, Rated Cost and Message Configuration to be maintained in Carrier Selection for trip planning (Y/N).	COS
TRIP_CHARGING_METHOD	Determines whether the calculation for the costs includes the trailer type of the trip: F is Fixed and includes the trailer type.	COS
TRIP_HAZARD_DISPLAYED	Show the Trip hazardous Totals or not.	SYS
TRIP_HAZARD_LEVEL1_CODE	The colour code of the hazardous weight level 1.	SYS
TRIP_HAZARD_LEVEL1_FROM	The lower value in the range of the hazardous weight level 1.	SYS
TRIP_HAZARD_LEVEL1_TO	The upper value in the range of the hazardous weight level 1.	SYS
TRIP_HAZARD_LEVEL2_CODE	The colour code of the hazardous weight level 2.	SYS
TRIP_HAZARD_LEVEL2_FROM	The lower value in the range of the hazardous weight level 2.	SYS
TRIP_HAZARD_LEVEL2_TO	The upper value in the range of the hazardous weight level 2.	SYS
TRIP_HAZARD_LEVEL3_CODE	The colour code of the hazardous weight level 3.	SYS
TRIP_HAZARD_LEVEL3_FROM	The lower value in the range of the hazardous weight level 3.	SYS
TRIP_HAZARD_LEVEL3_TO	The upper value in the range of the hazardous weight level 3.	SYS
TRIP_HAZARD_PRODUCTS		SYS



Parameter	Description	
	List the descriptions of the product types considered to be hazardous using a comma as a delimiter.	
TRIP_LABELS	Indicates the name of the report to be run from the Print Labels menu option in the trip tree in the Planning screen.	CO
TRIP_ORDER_XSD_VERS	Version of TRIP XSD being used.	SYS
TRIP_ORD_LATE_FORMAT_MASK	Display the format of the late available and late delivery columns as time only (TIME) or date and time (DATETIME).	SYS
TRIP_OVERVIEW_CURRENT_TYRES	Use the current quantity of tyres in the Trip Waterfall screen (Y/N)	SYS
TRIP_PREVENT_PARCEL_CARRIER_ASSIGNMENT	Controls the manual assignment and cross-docking of transport orders to trips for parcels (Y to disable or N to enable).	CO
TRIP_SHEET	Trip Sheet Report	CO
TRIP_TRAMPS_ON_WATERFALL	Allow tramping trips to be shown in waterfall form by date not schedule	SYS
TRIP_VALIDATE_PARCEL_ORDER_ASSIGNMENT	Controls validation of parcel orders to trips for parcel carriers (Y to disable or N to enable).	CO
TRLR_TYPE_RATE	Are trailer types included when estimating cost?	CO
TRM_3PL_SCHEDULE_NO_DROP	Enable orders without a drop number for the run to be pre-planned for Paragon (Y/N)	SYS
TRM_ACTION_MITIGATION	Order Reason Actions requiring Mitigation	SYS
TRM_ACTIVITY_QTY	Use Activity Quantity to determine when to create DEP control record	CO
TRM_ACT_PMTS_DEL_ORD_AT_CONF	Control whether Order payments should be updated, and Orders set to DELIVERED when Trip is set to confirmed	SYS
TRM_ADD_EDIT_ITEMS	Trip manipulation - display additional edit items.	SYS
TRM_ALLOW_REJECTIONS	Allow trips to be rejected when they are not tendered (Y/N)?	SYS
TRM_APPLY_DRIVER_BREAK_RULES	Switches Driver Breaks on or off - Y or N	SYS
TRM_APPLY_POD_AFTER_ACTUALS	Apply the POD after the all actuals button is pressed (IIB)	SYS
TRM_AUTO_DEL_TRIP_UNSCHD	Automatically delete trips when the last order is unscheduled from it	CO
TRM_AUTO_SET_ACCEPTED	Auto Set trip to accepted once all resources allocated	CO
TRM_BAXTER_ROUTES	Used to control when the process to populate trunk and radial routes is called	CO
TRM_BOL_PREFIX	Prefix that will be added to BOL when created in MTS.	CO
TRM_BOL_SUFFIX	Suffix that will be added to BOL when created in MTS.	CO
TRM_CANCEL_EMPTY_ORDER	Remove orders from trip going to Accepted if there are no items	CO
TRM_CARRIER_AUDIT	Controls whether audit records are written for Carrier CHANGES	CO
TRM_CHECK_CREW	Indicates if the Check_Crew functionality should be run.	CO
TRM_CHECK_LIMITS	Controls level at which Weight, RPE and Volume limits are checked - BY_STOP or NULL	SYS
TRM_CHK_DRIVER_CARRIER	Use carrier hubs if driver hubs not set	CO
TRM_CL_DFLT_fixed_time	Default Close Down time (minutes)	SYS
TRM_COMPLETED_SETTINGS	Indicates if CC/Customer Completed settings are in use	CO
TRM_CONSOLIDATE_STOPS	Allow consolidation of order on stops if time windows do not overlap	SYS
TRM_CONSOL_ORDER_AFTER_XDOCK	Consolidate the available time windows for a collected order against the orders being loaded for delivery (Y/N)	SYS



Parameter	Description	
TRM_CROSSDOCK_TIME	Time offset for delivery into crossdock location	CO3
TRM_DEBRIEF_SCREEN_TIME_VARIANCE_DISPLAYED	Is the Time Variance field displayed and updateable in the Trip Debrief screen.	SYS
TRM_DEFAULT_DRIVER	Default Driver ID	CO3
TRM_DEFAULT_TRACTOR	Default Tractor ID	CO3
TRM_DEPOT_SCANS	Are trunk trip scans checked	SYS
TRM_DESP_FOR_DEL	Maintain the Actual Despatched Quantity for a Delivery Trip in Trip Debrief (Y/N).	CO3
TRM_DFLT_DRV_BREAK_MINS	Default Driver Break (minutes)	SYS
TRM_DFLT_MAX_DRV_HRS_WO_BREAK	Default maximum drive hours without break	SYS
TRM_DFLT_MAX_DRV_HRS_WO_STOPOVER	Default maximum drive hours without stopover.	SYS
TRM_DFLT_MAX_WRK_HRS_WO_BREAK	Default maximum work hours without break	SYS
TRM_DFLT_MAX_WRK_HRS_WO_STOPOVER	Default maximum work hours without stopover.	SYS
TRM_DFLT_STOPOVER_BREAK_MINS	Default stopover duration (minutes).	SYS
TRM_DFLT_WRK_BREAK_MINS	Default work break duration (minutes)	SYS
TRM_DISPLAY_ERROR_MULTI_TRIP	Display Errors when changing multiple trips status	CO3
TRM_DISP_ISOTRAK_OR_EFX	Controls whether the Isotrak Ref or EFX Ref is displayed in the TRIPSUM form - ISOTRAK or EFX	SYS
TRM_DISP_OMS_OR_CUST_REF_OR_BOOK_OR_CONT_NO	Display OMS, Customer Ref, Booking Ref or Container No - OMS_REF, CUST_REF, CONT_NO or BOOKING_REF.	SYS
TRM_DISP_REV_COLDEL	Display Revenue on collection or delivery trip	CO3
TRM_DISP_RPE_DU_OR_WEIGHT	Controls whether RPE Qty, DU Qty or Total Weight is displayed in the TRIPSUM form - RPE, DU or WEIGHT.	SYS
TRM_DISP_SCHED_ALL	Trip manipulation - display schedule all check box.	SYS
TRM_DISP_VOL_OR_CASES	Controls whether Volume or Cases is displayed in Unscheduled Orders in TRIPSUM forms - VOLUME or CASES	SYS
TRM_DISTRIBUTE_MAX_ORD_COST	Indicates if the cost centre will DISTRIBUTE revenue charges	CO3
TRM_DO_NOT_UPDATE_ORD_DEL	Leave the order delivery type when the trip delivery type is different	CO3
TRM_DRIVER_HUB	Drivers are aligned to a Hub Location	SYS
TRM_DRIVER_RQD_FOR_ENROUTE_OR_ACC	Is a Driver required before a Trip can be set to EN_ROUTE or ACCEPTED	CO3
TRM_EARLIEST_STOP_WINDOW	Toggle (Y/N) to specify whether consolidation uses the earliest stop	SYS
TRM_ENFORCE_CARRIER_RULES	Enforce Carrier Hub Location Rules	CO3
TRM_ENFORCE_TRIP_RECALC	Enforce Trip Recalculation - YES or NO	SYS
TRM_EXCL_REG_AUTO	Planning Regions to be excluded from Auto Scheduling	CO3
TRM_EXCL_TIME_VALIDATION	Indicates if the available time of an order is not compared to the cut-off time for TRUNK or LINEHAUL routes in the network scheduling engine (Y/N).	SYS
TRM_FIXED_TRIP_STATUS	Determines status of trips created via Fixed Schedules. P for PLANNED or A for ACCEPTED.	SYS
TRM_HIGHLIGHT_OVERDUE_FINISH	Trip Status used in Trip Overview screen to highlight overdue finish time	SYS
TRM_HIGHLIGHT_OVERDUE_START	Trip Status used in Trip Overview screen to highlight overdue start time	SYS
TRM_IGNORE_DUP_LOC_CHECK	Dunelm orders from a supplier in Scotland to a store in Scotland need to visit the trailer swap location twice so ignore standard checks in TRM	SYS
TRM_INCL_TRUNK	Are trunk trips to be validated	SYS
TRM_INC_BASED_AT_LOC_TRIPS	Allows viewing of other depots transiting	SYS
TRM_LFS_PRINT_TRIP_POD_POC		SYS



Parameter	Description	
	Display LFS Trip Sheet POD POC report menu option (Y/N)?	
TRM_LOAD_DFLT_fixed_time	Default Loading Time (minutes)	SYS
TRM_LOAD_dflt_mins_per_rpe	Default loading rate per RPE (minutes)	SYS
TRM_LOAD_dflt_mins_per_weight	Default Loading rate per Weight (minutes)	SYS
TRM_LOC_RADIAL_ROUTES	Indicates if a radial route that is stored for the location will be used in the scheduling engine instead of the location zones (Y/N).	SYS
TRM_MANIFEST_DATES	Controls if the manifest is run based on dates	COS
TRM_MAX_DRIVING_HOURS	Maximum Driving Hours	SYS
TRM_MAX_ORD_COST	Indicates if the cost centre will base revenue charges on the Maximum at a single stop	COS
TRM_MAX_SHIFT_HOURS	Maximum Shift Hours	SYS
TRM_MAX_STOP_COST	Indicates if the cost centre will base cost charges on the Maximum at a single stop	COS
TRM_MAX_STOP_REVENUE	Indicates if the cost centre will base revenue charges on the Maximum at a single stop.	COS
TRM_MAX_WAIT_TIME	Maximum waiting time at Location (minutes)	COS
TRM_MERGE_END_OR_EXISTING_STOPS	Method-assigning orders to resulting trip in merge trips. Values: END or EXISTING. END adds orders to end. EXISTING adds orders to 1st available stop.	SYS
TRM_MIC_DRIVER	Are driver minutes updated from Microlise debrief	COS
TRM_MODIFY_SCHED	Allow the stop times of the delivery trip to be updated to match the new delivery times of the scheduled order (Y/N).	COS
TRM_MOVE_ITEM_TO_DESP_BAY	Move an item from the grid to the despatch bay when added to the order on the trip or its order is assigned to the trip (Y/N)	SYS
TRM_NETWORK_STOPS	Are trunk trip times set by the network table	COS
TRM_NEW_TRIP_STATUS_CHECKS	Control new restrictions on trip status change.	SYS
TRM_NLP_SUMMARY	Request a summary by country in the NLP distance and time calculations(Y/N)	COS
TRM_NLP_SUMMARY	Request a summary by country in the NLP distance and time calculations(Y/N)	COS
TRM_NON_STD_INSTRUCTIONS	Calculate Planning Instructions on Carrier Trip Form	COS
TRM_NO_STOP_DELETE	Do not delete stops	COS
TRM_NO_TIME_VALIDATION	Trip prefix to prevent validation	COS
TRM_ODO_DISTANCE_LIMIT	Limit used to validate difference between odo start and end entries in debrief areas of Trip Forms	SYS
TRM_OFFSET_PUBLIC_HOLIDAY	Indicates if the order time windows and the scheduling engine will be offset for the public holiday at the country, depot or route level (Y/N).	SYS
TRM_ORD_OVERVIEW	Include Orders in Trip Overview screen	COS
TRM_ORD_SCHED_FROM	Number of days back for schedule range	COS
TRM_ORD_SCHED_FROM_PLANNING	Number of days back for schedule range in Planning screen	SYS
TRM_ORD_SCHED_SEARCH	Maximum number of days for schedule range	COS
TRM_ORD_SCHED_SEARCH_PLANNING	Maximum number of days for schedule range in Planning screen	SYS
TRM_ORD_SCHED_TO	Number of days forward for schedule range	COS
TRM_ORD_SCHED_TO_PLANNING	Number of days forward for schedule range in Planning screen	SYS
TRM_OVERVIEW_AMBER_TIME	Time allowed before start and finish times are amber in TRIP OVERVIEW	SYS
TRM_OVERVIEW_RED_TIME	Time allowed before start and finish times are red in TRIP OVERVIEW	SYS
TRM_PLAN_ALL_RET_ORDERS	Plan all RET orders	COS



Parameter	Description	
TRM_PLAN_INVALID	Are un-manifested orders set to invalid	SYSS
TRM_PREVENT_ALL_DEBRIEF	Prevent setting of actuals in trip debrief	SYSS
TRM_PREVENT_CONSOL_ACROSS_STOPS	Stop orders being added to shipments when not on same stops	COSS
TRM_PREVENT_ORD_ON_COMP_STOP	Prevent Orders Being Planned on Completed stops	SYSS
TRM_PROSPERO_ADV_DAYS	Advance Scheduling days for Prospero	SYSS
TRM_PROTECT_SHUNTS	Protect the times from the order windows for the trip stops for shunt trips for collections (Y/N)	SYSS
TRM_RECALC_ELAPSED_TIME	Always recalculate elapsed time on trip	COSS
TRM_RETAIN_CARRIER_NEW_SCHED	It is to retain a carrier when the schedule of the trip is updated. Otherwise, the carrier is reset to the carrier for the owning depot.	COSS
TRM_RETAIN_EMPTY_STOPS	Retain empty stops when validating the trip.	COSS
TRM_RETAIN_MTM	Retain MTM cost when set to Planned	SYSS
TRM_RETAIN_ORD_STATUS_TRIP_COMPLETE	Retain the current order status if trip status is set to COMPLETED (Y/N)	COSS
TRM_RETAIN_PACK_DATA	Retain Pack Data either via Paragon or advise user to retain or delete pack data if manually unscheduling order.	COSS
TRM_ROUND_RPE_AT_STOP	Round RPE at unload stop	SYSS
TRM_SCHEDULE_BY_DEL	Controls if orders are manually scheduled onto trips by del time	SYSS
TRM_SEND_PLUTO_ACTUALS	Actuals process for PLUTO	COSS
TRM_SEND_PRE_DELIVERY_MSG	Activates email and SMS functionality	COSS
TRM_SET_ACTUALS_AFTER_ENROUTE	Should Actuals (arrive/depart) be set for Trip stop 1 when trip is set to En-Route - Y or N	COSS
TRM_SET_DESP_AFTER_ENROUTE	Should the actual despatched values for an order be set when the trip status is set to EN-ROUTE (Y to enable or N to disable).	COSS
TRM_SET_NEW_STOP_TIMES	Trip prefix to set stop times based on trip duration	COSS
TRM_SET_OWNING_DEPOT	Priority for assigning owning depot to a trip	COSS
TRM_SET_TO_COMPLETED	Should trip be auto set to Completed. Values are N, ACTUAL (after actuals have been applied), POC/POD (when POC and POD applied to all Orders).	COSS
TRM_SET_TO_COMP_AFTER_TIMES	Are trips set to completed when stop actuals have been set?	SYSS
TRM_SET_TO_CONFIRMED	Should trip be auto set to Confirmed. Values are N, ACTUAL (after actuals have been applied), POC/POD (when POC and POD applied to all Orders).	SYSS
TRM_SET_TO_ENROUTE_AFTER_ACTUALS	Should trip be set to En-Route after first order has been collected - Y or N	COSS
TRM_SHIFT_TIMES_FOR_TRIP	Use Shift Times For Start And End Times Of Trip	SYSS
TRM_SHOW_LATE_BUTTON	Is the Show Late Reasons Button visible.	SYSS
TRM_SHOW_TIME_DEBRIEF_BTNS	Show time debrief buttons in trip debrief	SYSS
TRM_SHOW_TRIP_EXPORT_BTN	Show Export Button in TRIP screens. Specifically for Road Ops Report	SYSS
TRM_SOURCE_SYSTEM	Highlight the trip details when it contains an order without an OPEN status in the WMS source system (Y/N)	SYSS
TRM_STACK_DEBRIEF	Trip Stack Debrief	COSS
TRM_STATUS_FOR_CONSOLIDATION	The trip status that controls the consolidation by customer or customer group, enter BOTH for ACCEPTED and PLANNED	SYSS
TRM_STOP_TIMES_FROM_ORDS	Will the trip stop times be inherited from the delivery time window of the order? (Y/N)	CUS
TRM_STORE_TRIP_MOVES	Determines whether audit of old and new trips is stored against orders	COSS



Parameter	Description	
TRM_SU_DFLT_fixed_time	Default Start Up time (minutes)	SYS
TRM_SVC_TYPE	Is SVC_TYPE Editable on TRIP forms?	SYS
TRM_TEMP_DEBRIEF	Display temperature on Trip debrief	SYS
TRM_TRACTOR_RQD_FOR_ENROUTE_OR_ACC	Is a Tractor (Vehicle) required before a Trip can be set to EN_ROUTE or ACCEPTED	COS
TRM_TRAILER_RQD_FOR_ENROUTE_OR_ACC	Is a Trailer Id required on every stop before a Trip can be set to EN_ROUTE or ACCEPTED	COS
TRM_TRANSPORT_MODE_REQD	Is the transport mode on the trip screens a required field	COS
TRM_TREE_FORMAT	Determines trip tree display format	COS
TRM_TREE_ROUTE	Determines whether Route code is displayed in trip tree	COS
TRM_TRIP_STATUSES	List of Trip Statuses to control which trips displayed in Tripdtl/Trip Debrief form.	SYS
TRM_TRUNK_TIME	Time in minutes for assessing Trunk Trips	COS
TRM_UNLOAD_DFLT_fixed_time	Default unloading time (minutes)	SYS
TRM_UNLOAD_dflt_mins_per_rpe	Default unloading rate per RPE (minutes)	SYS
TRM_UNLOAD_dflt_mins_per_weight	Default Unloading rate per RPE (minutes)	SYS
TRM_UNSCHEDULE_TO_CANCEL	Controls if orders are Unscheduled when a cancellation is received	SYS
TRM_UPDATE_ALL_ACTUALS	When a line actual is debriefed all actuals are set	COS
TRM_USE_ACTUALS_FOR_STOP_TIMES	Use Actual Times at stops to calculate times for next stop	SYS
TRM_USE_MAX_RPE_OF_LARG_TRAILER	Controls whether MTS uses Max RPE of Largest Trailer Type when adding Orders to Trips - Y or N (N will use Current Trailer)	SYS
TRM_VALIDATE_STOP_TIMES	Show Validation messages on stop times and prevent the user from going to accepted (Y/N)	SYS
TRM_VALIDIDATE_DU_TEMP	Validate Du temp by product and DU	COS
TRM_VAL_CAR_VESSEL	Trip manipulation - validate carrier after vessel has been allocated.	SYS
TRM_WASTE_SITE	Amend TO_LOC to a waste site in order well	COS
TRM_WEIGHTED_AVE_FILL_ACCEPT_PCEN	Defines the acceptable percentage for trip weighted average fill	SYS
TRM_WEIGHTED_AVE_FILL_MIN_PCEN	Defines the minimum required percentage for trip weighted average fill	SYS
TRM_WMS_STATUS	Controls if WMS status is calculated and if WMS status fields displayed in Trip forms.	COS
TRM_XDOCK_VALIDATION	Different Validation for the Cross dock process	COS
TRM_XDOCK_VIA_ROUTE	Display additional route information when selecting trip for XDOCK orders (Y/N)	SYS
TRP_RED_TRUCK_ERRORS	Indicates if the truck icon is red to indicate an error	SYS
TRP_SEND_ENABLE_MSG	Which enabling message is to be sent by Trip form	SYS
TRP_SEND_WAREHOUSE_LOAD	Include Warehouse Loading Time in the outbound XML flow.	COS
TRP_STACK_DEBRIEF	Trip Stack Debrief	COS
TRUNK_LOAD	Time (minutes) to load an order on a trunk trip	SYS
TRUNK_UNLOAD	Time (minutes) to unload an order on a trunk trip	SYS
UKMAIL_ADD_INFO_LABEL	Additional information on UKMail Label	COS
UKMAIL_USE_CUST_REF_ON_LABEL	Controls if customer ref is displayed on UKMAIL label	CUS
UNISON_ORDER_INT_TYPE	EIH Interface Type (UNISON ORDER)	SYS
UNI_DEFAULT_DU_TYPE	Default DU Type for Orders created via the UNISON interface.	SYS
UNI_ENABLED	To enable the inbound and outbound file processing on this DB	SYS
UNI_FTP_DESTINATION_DIRECTORY	Directory for FTP of Unilever Files	SYS



Parameter	Description	
UNI_FTP_DESTINATION_IP_ADDRESS	IP for FTP of Unilever Files	SYS
UNI_FTP_DESTINATION_PASSWORD	Password for FTP of Unilever Files	SYS
UNI_FTP_DESTINATION_PORT	Port for FTP of Unilever Files	SYS
UNI_FTP_DESTINATION_USERNAME	Username for FTP of Unilever Files	SYS
UNI_INBOUND_ARCH	Path for processed XML files that have successfully completed processing, see: int_po_inbound_header (Unilever)	SYS
UNI_INBOUND_FAIL	Path for processed XML files that have failed processing for reasons described against int_po_inbound_header (Unilever)	SYS
UNI_INBOUND_PATH	Path for yet to be processed XML files (Unilever)	SYS
UNI_LOCATION	Location for Unilever	SYS
UNI_OUTBOUND_ARCH	Path for processed XML files for Unilever	SYS
UNI_OUTBOUND_FAIL	Path for processed XML files for Unilever that have failed processing	SYS
UNI_OUTBOUND_IDENTIFIER	Unilever outbound file identifier	SYS
UNI_OUTBOUND_PATH	Path for yet to be processed XML files for Unilever	SYS
UNSCHED_ORDERS_DEL_DAYS	Unscheduled orders on schedules older than this value will be deleted	SYS
UPDATE_DIR	client Server Update directory	SYS
UPDATE_IP_ADDR	Client Server Update IP Address	SYS
UPDATE_IP_ADDR_CGEY	CGEY Client Server IP Address	SYS
UPDATE_ORDERS_TO_TRIP	Update Order Windows to match selected trip	CO
UPDATE_ORDER_TIMES_TO_TRIP	Enable the current orders to have their time windows updated to match the stop time windows in the 'Confirm Update/Add' process (Y/N)	CO
UPDATE_PASSWORD	Client Server Update Password	SYS
UPDATE_TO_DELIVER	update the To deliver quantity with the Ordered quantity for New order Items	SYS
UPDATE_USER	Client Server Update User	SYS
UPD_CUST_DATES	Default part Number	CUS
UPGRADE_PASSWORD	Client Server Upgrade Password	SYS
UPGRADE_USER	Client Server Upgrade Username	SYS
UPPERCASE_ASSET_ID	Asset id to be stored in upper case	SYS
URGENT_ORDER	Controls if Urgent Notification emails are sent to planners	CO
URGENT_ORD_DELIVERY	Controls which delivery types trigger an urgent notification	CO
URGENT_ORD_RECIPIENT	Controls who receives an urgent notification	CO
USE_CHILD_LOCATIONS	Use any child locations in preference to the master locations of an order in the requested reports? (Y/Y)	CO
USE_ORDER_ADDRESSEE	Will the addressee name be used for the order? (Y/N)	CO
USE_PACK_QUANTITY	Use the current quantity of tyres in the Trip Waterfall screen (Y/N)	SYS
USE_PALLET_ID_XML	Use Pallet ID instead of item identifier in XML Outbound files	CO
USE_SECURITY_PROFILES	Use Security Profiles for users	SYS
USE_SMS_GATEWAY	Use SMS Gateway for SMS message sending	SYS
USE_XML_ORDER_SUB_REFS	Print order sub refs on outbound XML	CO
USE_XML_ORDER_SUB_REFS	Print order sub-references in the outbound XML file? (Y/N)	CO
UTL_IMPORT_IGNORE_INVALID_OPERATION	The import process of files will suppress the auditing of messages when a file does not exist on the server to overwrite (Y/N)	SYS
VALIDATE_LOCATION_ON_CLOSE	Validate address details if the close button is pressed within locations screen (Y/N)?	SYS



Parameter	Description	
VALIDATE_MASTER_LOC	Validate the collection and delivery location of the order against the decoded master locations (Y/N)	CO
VB_UPLOAD_APP_VERSION	Version number of the PC MTS Upload/Import Application written in Visual Basic	SYS
WARN_MISSING_PO	Warn if No PO Allocated to a trip when status or carrier changed	CAR
WARN_OUTSTANDING4933	Warn of unmatched 4933 orders on trip status change	CUS
WATERFALL_UPDATES	control updates on the waterfall screen	SYS
WCS_441_CHECK_DAYS	Set a number of days in which to assess the prior loading messages for WCS.	SYS
WCS_CALC_ITEM_WGT_VOL	Calculate the weight and volume for the DU in the 804 scan (Y/N).	CO
WCS_CALC_ITEM_WGT_VOL	Calculate the weight and volume for the DU in the 804 scan (Y/N).	CUS
WCS_CLEARDOWN_DAYS	Number of days after which WCS control records will be cancelled.	SYS
WCS_COLLECTION_PREADVICE	Do we call collection pre-advice	NO
WCS_COMBINED_ADD_LOAD	WCS add items and loading into a single scan	SYS
WCS_DEFAULT_AGENT	Default agent for WCS messages	SYS
WCS_DUAL_INSTANCE	Dual Instance WCS....***DUNELM ONLY***	SYS
WCS_ENABLED	Is the WCS system enabled?	SYS
WCS_MIN_ITEM_LENGTH	Min length of WCS_ITEM to check for match in CTMS	SYS
WCS_MULTI_DEPOTS	Pre-advice WCS when depot is different	SYS
WCS_OLD_404_DAYS	Number of days to allow old 404 messages to be sent to WCS	SYS
WCS_ORD_BUILD_ENABLED	Y to enable WCS Re-advice resend of Orders Overnight Processing	SYS
WCS_RETAIN_EMPTY_LINES	Retain any empty order lines that have been created when their items have been deleted during the order confirmation process? (Y/N)	SYS
WCS_SET_BAY_GRID_ITEMS_ONLY	Only update item locations that are on the grid	SYS
WCS_SPLIT_LOAD_PLAN	Automatically plan the split load orders to final destination	SYS
WCS_SPLIT_ORDER_BY_TRIP	Allow an order to be split when its items are loaded on different trips for delivery (Y/N)?	CO
WEB_SERVICE_STORE_REQ	Determines if the message request sent to the web server enquiry should be stored in the audit record - Y will store the message as a CLOB value.	SYS
WEB_SERVICE_STORE_RESP	Determines if the message in response to the web server enquiry should be stored in the audit record - Y will store the message as a CLOB value.	SYS
WEB_SERVICE_USER	User name for web service	SYS
WMS_INBOUND_ARCH	Path for WMS XML archiving	SYS
WMS_INBOUND_FAIL	Path for WMS XML failures	SYS
WMS_INBOUND_LISTING_NAME	Filename for list of files in directory for WMS XML Order Inbound	SYS
WMS_INBOUND_ORD_IDENTIFIER	Pattern for WMS Order Inbound XML	SYS
WMS_INBOUND_PATH	Path for yet to be processed XML files from WMS	SYS
WMS_LISTING_SCRIPT_NAME	Script name for WMS XML Order Inbound	SYS
WOC_MSG_SEND_COUNT	Number of message per run sent to WCS via WOC	SYS
WSA_ARCHIVE_DAYS	Determines the number of days that the web service messages will be retained in C-TMS prior to being archived.	SYS
WS_COLLECT_LOCATION	Collection location to override one provided in web service to override collection depot in partnership	CUS
WS_COL_CUTOFF	Cut-off time for web service orders from an RDC to make the next days delivery.	SYS



Parameter	Description	
WS_DERIVE_COL_WINDOW	Derive Collection windows for Web Service Orders	CO3
WS_DUMMY_DU_TYPE	Dummy DU Type used for Web Service order creation	SYS
WS_EARLY_AVAIL_TIME	Early available time for Web Service Orders	CO3
WS_MAX_MANF_RPE	Maximum RPE value for Web service	SYS
WS_NUM_OF_RETRIES_ALLOWED	Max number of times a record will be sent to a web service endpoint	SYS
WS_REASON_CODE	Default reason code for Web service	SYS
WS_USE_TRIP_STATUS	Use Trip Status for Web Service	CO3
XML_NO_DELAY_FILES	List of XML filenames that will require no delay in polling time (eg pack confirmation).	SYS
XML_OUT_SUMM_LVL	Level to summarize XML outbound message	SYS
ZERO_MANIFEST	Allow orders to be zero manifested and set to ABORTED	CO3
ZERO_PACK_REASON	Zero packed reason code	CO3
ZETES_INSTALLED	Zetes installed	SYS
ZET_INBOUND_ARCH	Path for Microlise XML archiving	SYS
ZET_INBOUND_FAIL	Path for Microlise XML failures	SYS
ZET_INBOUND_IDENTIFIER	Pattern for MIC Trip Inbound XML	SYS
ZET_INBOUND_LISTING_NAME	Filename for list of files in directory for MIC XML Trip Inbound	SYS
ZET_INBOUND_PATH	Path for yet to be processed XML files from Microlise	SYS
ZET_INC_SSCC_PREFIX	Include prefixes for SSCC formats for the Zetes interface (Y/N).	CO3
ZET_LISTING_SCRIPT_NAME	Script name foe MIC XML Trip Inbound	SYS
ZET_OUTBOUND_ARCH	Path for safe copy of XML files for Zetes	SYS
ZET_OUTBOUND_PATH	Path for yet to be collected XML files for Zetes	SYS
ZIP	Zip executable location on application server	SYS
ZIP_SERVER	Application server folder for zipped Invoice files	SYS
ZONE_POSTCODE_CHECK	Does Zone import check the postcode	SYS
zip	Location of the zip executable on the application server	SYS
API_CARRIER_PLAN	The carrier for the API process which the customer will use with pre-packed labels	CUS
DO_NOT_UPDATE_LOADING_RATES	Do not update loading rates via customer onboarding	SYS
FLEXIPOD	Set to Y to indicate the FlexiPod interface is active	SYS
FLEXIPOD_ACID	Flexipod acid	SYS
FLEXIPOD_BREAK_DROPS	Flexipod include breaks for the drops in the Add API call (Y/N)	SYS
FLEXIPOD_CARRIERS	Set to Y indicates the Carrier can control if a trip is sent to FlexiPod	SYS
FLEXIPOD_CLIENTNUM	FleXipod ClientNum sent in interface	SYS
FLEXIPOD_DEPOTS	Set to Y indicates the Depot can control if a trip is sent to FlexiPod	SYS
FLEXIPOD_DIRECT	Set to Y to indicate the FlexiPod interface is direct and not using Route Execution	SYS
FLEXIPOD_DROP	Determines the Drop level STOP-OMS or ITEM	SYS
FLEXIPOD_EXPIRY	Sets the expiry date for the manifest as a number of days after the end of the trip.	SYS
FLEXIPOD_EXTERNALSYSTEMUPDATE	Flexipod process the External System Update messages in the API call (Y/N)	SYS
FLEXIPOD_FORCEITEMSCAN	Force the items to be scanned separately: 0 to use the ScanLevel or 1 to force the scan by item.	SYS
FLEXIPOD_LISTPENDINGMANIFESTS	Flexipod process the List Pending Manifest Update messages in the API call (Y/N)	SYS
FLEXIPOD_MERGE_DROPS	Flexipod merge the orders on the drop in the Add API call (Y/N)	SYS



Parameter	Description	
FLEXIPOD_PASSWORD	Flexipod Webservice password	SYS
FLEXIPOD_PROXY	Flexipod proxy server	SYS
FLEXIPOD_READDROP	Flexipod process the Read Drop messages in the API call (Y/N)	SYS
FLEXIPOD_SCAN_LEVEL	1,2 or 3 to indicate line or item level scanning	SYS
FLEXIPOD_SCAN_TYPE	Contents and items	SYS
FLEXIPOD_SIGNATORY	Set to Y to store the SignedByName as the actual signatory as information for the order at its collection of delivery location	SYS
FLEXIPOD_SPLIT	Are orders to be split?	SYS
FLEXIPOD_SYSTEM	Flexipod SYSTEM ID sent in interface	SYS
FLEXIPOD_TPCLIENTNUM	Flexipod TPClientNum sent in interface	SYS
FLEXIPOD_USERCODE	Flexipod webservice usercode	SYS
FLEXIPOD_USERNAME	Flexipod webservice username	SYS
FLEXIPOD_WEBSERVICE	Flexipod webservice endpoint URL	SYS
FLEXIPOD_WEBSERVICE_TASK	Flexipod webservice endpoint URL for Tasks	SYS
FLEXIPOD_WEBSERVICE_UI	Flexipod webservice endpoint URL	SYS
FLEXIPOD_WEBSERVICE_UI_EXEC	Flexipod webservice endpoint URL for Route Execution	SYS
FLEXIPOD_X_API_KEY	Flexipod x-api-key for External System Update messages	SYS
IMP_DERIVE_FROM_LOCATION	Derive the collection location of an order.	COS
IMP_DERIVE_ORDER_WINDOWS	Derive the order windows.	COS
IMP_SET_ORDER_TYPE	Set the order type to RET, SLS or DIR.	COS
IMP_SPLIT_CONTACT_NAME	Split a contact name into Forename and Surname.	COS
LIMIT_ADDRESS_MATCH	Limit address matching to line1, line2 and postcode	SYS
LOOKUP_FOR_ROUTE_CODES	Display lookup button in PLANNING beside Route Code	SYS
PSD_CONTACT_ADDRESS	Polar Speed Distribution Ltd	SYS
PSD_CONTACT_TEL	Tel: +44 (0) 1525 217666	SYS
REBOOK_REQ_SUBREF	Add Rebook Sub reference when CBR exception added to item	SYS
REBOOK_SERVICE_LEVEL	Service Level For rebooked orders when set to copy use existing	SYS
RESET_MANUAL_SCHEDULE	Reset manual schedule flag from the planning screen	SYS
TMP_ENG_TRIP_PREFIX	Scheduling Engine Trip Prefix	COS
TRM_3PL_REROUTE	Reroute the order in the fixed-drop scheduling engine to the next available route for the day (Y/N)	SYS

